

Catalogue 2026



Homes | Offices | Retail | Industries | Warehouses | Outdoor | Appliances

COMPACT COMPACT COMPACT COMPACT COMPACT COMPACT COMPACT COMPACT

www.compactledandappliances.com

Futuristic Manufacturing Facility

A proud champion of the Government's Make in India initiative, COMPACT'S future forward plant produces a wide range of world class lighting products and home appliances under one roof.

- Our smart facilities incorporate the best practices of automated manufacturing systems, spread across a vast 40,000 sq. ft. of covered area.
- More than 12 dedicated lines for high Volume production.
- Full backward integration like our own Extrusion machines, we are dedicated towards local manufacturing with "Made in India" Products not just assembled in India.
- Advanced in-house LED laboratory features cutting-edge equipment like Spectro Radiometer, Surge Generator, and Humidity Chamber, ensuring rigorous testing for superior performance, reliability, and durability of our products.
- LED module manufacturing unit equipped with high-speed SMT machines, capable of mounting 1.5 million LEDs/components daily, ensuring precision, efficiency, and high-quality production at an exceptional scale.





“ तमसो मा ज्योतिर्गमय ” - Leading from darkness to light

Meet COMPACT – where innovation meets trust. For over 30 years, We have been redefining manufacturing excellence providing reliable, highest quality products to Indian consumers. From pioneering energy efficiency technologies in 1995 to being the first movers in introducing LED bulbs in 2003, we have consistently stayed ahead of the curve, shaping the future of FMEG solutions.

Our rigorous quality control ensure that every product we craft delivers unparalleled performance. But beyond the machines and processes, it's our people who drive us forward—70% of our workforce consists of skilled women professionals, a testament to our commitment to empowerment and progress.

Our dedication to quality isn't just a promise—it's a standard we uphold every day. Our products adhere to the best-in-class safety and performance standards. COMPACT is a hallmark of trust and we truly cherish the faith that our customers have reposed in us. With numerous patents to our name, innovation is ingrained in our DNA.

COMPACT product portfolio is built for versatility—whether it's Bulbs and battens or architectural lights for elegant interiors, powerful streetlights for cityscapes, or high-performance floodlights for expansive spaces, we cater to every need. Our range of electrical accessories and appliances, from Insulation Tape, extension boards, mosquito rackets to Heating and cooling appliances adds even more value to everyday life.

Our channel partners form the strong foundation that has shaped COMPACT into the thriving force it is today. With presence in over 10,000 retail points nationwide, we hold our extended family of retailers very close to our heart. These relationships are our growth engines and we stay committed to them as we do to our core values of Integrity and Trust. For You, With You, Always.



BIS Certificate

Our Ref: REGISTRATION: CRS-2018-271318-R-9308049 Dated: 2024-08-21 12.36.1 RENEWAL ID - 27789 Subject: RENEWAL OF LICENCE R-9308049 AS PER IS 10122 (Part 1): 2012 Capitol Green & Pans B-84, Phase-II, SECTOR-86, NOIDA, Gautam Buddha Nagar UTTAR PRADESH, India, 201301 Dear Sir/Madams, With reference to your online application dated 21-08-2024 for renewal of the above mentioned licence, this is to inform you that the same has been renewed from 28-08-2024 to 28-08-2026. It may be noted that the said licence granted under clause (b) of sub section (2) of section 13 of the Act shall expire at the end of the period for which it is granted unless renewed or its renewal is deferred. You are, therefore, requested to apply for next renewal to BIS within three months before the expiration of the licence. Thanking you, Yours faithfully, Registration Department Bureau of Indian Standards, 9, Bahadur Shah Zafar Marg, New Delhi-110002 India Tel: +91-11-23238871 E-mail: registration@bis.gov.in Note: This is a system generated letter. Hence signature is not required. To verify authenticity of letter, kindly scan the QR code on this letter.	Our Ref: REGISTRATION: CRS-2018-405718-R-9308035 Dated: 2024-08-21 12.36.1 RENEWAL ID - 27792 Subject: RENEWAL OF LICENCE R-9308035 AS PER IS 10122 (Part 5) Sec 13: 2012 Capitol Green & Pans B-84, Phase-II, SECTOR-86, NOIDA, Gautam Buddha Nagar UTTAR PRADESH, India, 201301 Dear Sir/Madams, With reference to your online application dated 21-08-2024 for renewal of the above mentioned licence, this is to inform you that the same has been renewed from 28-08-2024 to 28-08-2026. It may be noted that the said licence granted under clause (b) of sub section (2) of section 13 of the Act shall expire at the end of the period for which it is granted unless renewed or its renewal is deferred. You are, therefore, requested to apply for next renewal to BIS within three months before the expiration of the licence. Thanking you, Yours faithfully, Registration Department Bureau of Indian Standards, 9, Bahadur Shah Zafar Marg, New Delhi-110002 India Tel: +91-11-23238871 E-mail: registration@bis.gov.in Note: This is a system generated letter. Hence signature is not required. To verify authenticity of letter, kindly scan the QR code on this letter.	Our Ref: REGISTRATION: CRS-2018-400118-R-9308094 Dated: 2024-08-21 12.36.2 RENEWAL ID - 27791 Subject: RENEWAL OF LICENCE R-9308094 AS PER IS 10122 (Part 5) Sec 13: 2012 Capitol Green & Pans B-84, Phase-II, SECTOR-86, NOIDA, Gautam Buddha Nagar UTTAR PRADESH, India, 201301 Dear Sir/Madams, With reference to your online application dated 21-08-2024 for renewal of the above mentioned licence, this is to inform you that the same has been renewed from 28-08-2024 to 28-08-2026. It may be noted that the said licence granted under clause (b) of sub section (2) of section 13 of the Act shall expire at the end of the period for which it is granted unless renewed or its renewal is deferred. You are, therefore, requested to apply for next renewal to BIS within three months before the expiration of the licence. Thanking you, Yours faithfully, Registration Department Bureau of Indian Standards, 9, Bahadur Shah Zafar Marg, New Delhi-110002 India Tel: +91-11-23238871 E-mail: registration@bis.gov.in Note: This is a system generated letter. Hence signature is not required. To verify authenticity of letter, kindly scan the QR code on this letter.	Our Ref: REGISTRATION: CRS-2018-400118-R-9308094 Dated: 2024-08-20 12.36.2 RENEWAL ID - 34718 Subject: RENEWAL OF LICENCE R-9308094 AS PER IS 10122 (Part 1): 2012 Capitol Green & Pans B-84, Phase-II, SECTOR-86, NOIDA, Gautam Buddha Nagar UTTAR PRADESH, India, 201301 Dear Sir/Madams, This is to inform you that your BIS Self Declaration of Conformity Registration No. R-9308094, Subject: RENEWAL OF LICENCE R-9308094 AS PER IS 10122 (Part 1): 2012 is valid upto 07-08-2025. As you are aware that renewal of your Registration was deferred due to the non-submission of renewal application & this is in view of clause of renewal application & this is on 08-08-2025, Compliance Authority of BIS has decided to issue your above referred Registration for 2 years from 08-08-2025 to 07-08-2027. It also has been decided to apply you to ensure marking on your article as per marking guidelines of the above referred Registration with immediate effect. It may please be noted that your registration shall expire at the end of the above mentioned period. You are, therefore, requested to send your renewal application along with fee for its renewal within three months before the expiry of the Registration. Thanking you, Yours faithfully, Registration Department Bureau of Indian Standards, 9, Bahadur Shah Zafar Marg, New Delhi-110002 India Tel: +91-11-23238871 E-mail: registration@bis.gov.in Note: This is a system generated letter. Hence signature is not required. To verify authenticity of letter, kindly scan the QR code on this letter.
--	---	---	---



Panels... 01-07



Downlights/Spot Light...08-13



COB Downlights... 14-19



Track Lights... 20-21



Rope/Strip Light/
Power Supply... 22-25



Festive Lights... 26-26



Rechargeable Table/
Night Lamp... 27-27



Batten/Bulbs... 28-31



Tube/Reflector Industrial
Range... 32-32



Drivers/Lava Driver... 33-33



Matrix Sleek... 34-35



Flood Light... 36-40



Highbay Light... 41-42



Street Lights... 43-46



Accessories &
Appliances.. 47-52

6W
12W
15W
18W
24W
PANEL
UNO

LED 2835

Non Adjustable

Very Wide Beam

6-25mm Ceiling Thickness

IP 20 Dust / Insect protected


CRI > 80

PF > 0.90

4KV Surge Protection

In-Built Driver

(180-350V) AC 50Hz

Colours Available CW NW WW

Fluctuation Proof

2 YEAR WARRANTY
FEATURES:
Backlit Downlight Panel | Polycarbonate Housing | Anti Glare Recessed Mounting
UNO - Panel Round

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-710	6W	CW/NW/WW	H=28, CO=Ø75, OD=108	540	40
L-712	12W	CW/NW/WW	H=28, CO=Ø110, OD=130	1080	40
L-715	15W	CW/NW/WW	H=28, CO=Ø140, OD=160	1350	40
L-721	18W	CW/NW/WW	H=28, CO=Ø140, OD=160	1600	40
L-723	24W	CW/NW/WW	H=30, CO=Ø167, OD=184	2400	-

UNO Click (3 in 1) - Panel Round - Colour Change on Click

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-712C	12W	3 in 1 :	H=28, CO=Ø110, OD=130	1080	40
L-715C	15W	3 in 1 :	H=28, CO=Ø140, OD=160	1350	40
L-721C	18W	3 in 1 :	H=28, CO=Ø140, OD=160	1600	40

6W

12W

15W

18W

24W

PANEL

UNO



LED 2835



Non Adjustable



Very Wide Beam



6-25mm Ceiling Thickness



IP 20 Dust / Insect protected



CRI >80



PF >0.90



4KV Surge Protection




In-Built Driver



(180-350V) AC 50Hz



Colours Available CW NW WW



Fluctuation Proof



2 YEAR WARRANTY

FEATURES:

Backlit Downlight Panel | Polycarbonate Housing | Anti Glare Recessed Mounting

UNO - Panel Square

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-716	6W	CW/NW/WW	H=28, CO=Ø75X75, OD=96X96	540	40
L-718	12W	CW/NW/WW	H=28, CO=Ø110X110, OD=130X130	1080	40
L-720	15W	CW/NW/WW	H=30, CO=Ø140X140, OD=159X159	1350	40
L-722	18W	CW/NW/WW	H=30, CO=Ø140X140, OD=159X159	1600	40
L-724 NEW	24W	CW/NW/WW	H=32, CO=Ø170X170, OD=185X185	2400	-

UNO Click (3 in 1) - Panel Square - Colour Change on Click

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-718C	12W	3 in 1 : CW - NW - WW	H=28, CO=Ø110X110, OD=130X130	1080	40
L-720C	15W	3 in 1 : CW - NW - WW	H=30, CO=Ø140X140, OD=159X159	1350	40
L-722C	18W	3 in 1 : CW - NW - WW	H=30, CO=Ø140X140, OD=159X159	1600	40

6W
8W
12W
15W
18W
24W

LED 2835

**Non
Adjustable**

**Very Wide
Beam**

IP20
Dust / Insect
protected


**CRI
> 80**

**PF
> 0.90**

4KV
Surge
Protection

**In-Built
Driver**

(180-350V)
AC 50Hz

Colours Available
CW NW WW

Fluctuation Proof

**2 YEAR
WARRANTY**
FEATURES:
**Backlit Downlight Panel | Polycarbonate Housing | Anti Glare
Borderless | Surface Mounting**
UNO Star - Panel Round Surface

Cat No	Power	Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen (lm)	Packing Case
L-265	6W	CW/NW/WW	H=25 , OD=90	600	40
L-266	12W	CW/NW/WW	H=25 , OD=120	1200	30
L-275	15W	CW/NW/WW	H=25 , OD=155	1500	20
L-262	18W	CW/NW/WW	H=25 , OD=155	1800	20
L-252	24W	CW/NW/WW	H=25 , OD=191	2400	12

UNO Star - Panel Square Surface

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Packing Case
L-243	6W	CW/NW/WW	H=25 , L=90, B=90	600	40
L-244	12W	CW/NW/WW	H=25 , L=120, B=120	1200	30
L-250	15W	CW/NW/WW	H=25 , L=155, B=155	1500	20
L-249	18W	CW/NW/WW	H=25 , L=155, B=155	1800	20
L-248	24W	CW/NW/WW	H=25 , L=190, B=190	2400	12

UNO Classic - Panel Round Surface

Cat No	Power	Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen (lm)	Packing Case
L-271	8W	CW/NW/WW	H=31, OD=98	800	40
L-284	15W	CW/NW/WW	H=31, OD=140	1500	20

6W 12W 15W 18W 22W

PANEL

LUMI



LED 2835



Non
Adjustable



Very Wide
Beam



Ceiling
Thickness



IP 20
Dust / Insect
protected



CRI
>80



PF
>0.90



4KV
Surge
Protection




In-Built
Driver



(180-350V)
AC 50Hz



Colours Available
CW NW WW



Fluctuation Proof



2 YEAR
WARRANTY

FEATURES:

Backlit Downlight Panel | Polycarbonate Housing | Anti Glare
Recessed Mounting

Lumi - Panel Round

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-731	6W	CW/NW/WW	H=25, CO=Ø100, OD=119	540	40
L-733	12W	CW/NW/WW	H=25, CO=Ø125, OD=144	1080	40
L-735	15W	CW/NW/WW	H=25, CO=Ø150, OD=168	1350	40
L-737	18W	CW/NW/WW	H=25, CO=Ø150, OD=168	1600	40
L-739	22W	CW/NW/WW	H=25, CO=Ø195, OD=215	2000	20

Lumi - Panel Square

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-741	6W	CW/NW/WW	H=25, CO=Ø100XØ100, OD=119X119	540	40
L-743	12W	CW/NW/WW	H=25, CO=Ø125XØ125, OD=144X144	1080	40
L-745	15W	CW/NW/WW	H=25, CO=Ø150XØ150, OD=168X168	1350	40
L-747	18W	CW/NW/WW	H=25, CO=Ø150XØ150, OD=168X168	1600	40
L-749	22W	CW/NW/WW	H=25, CO=Ø195XØ195, OD=215X215	2000	20

6W

12W


15W

18W

22W

PANEL

CLASSIC

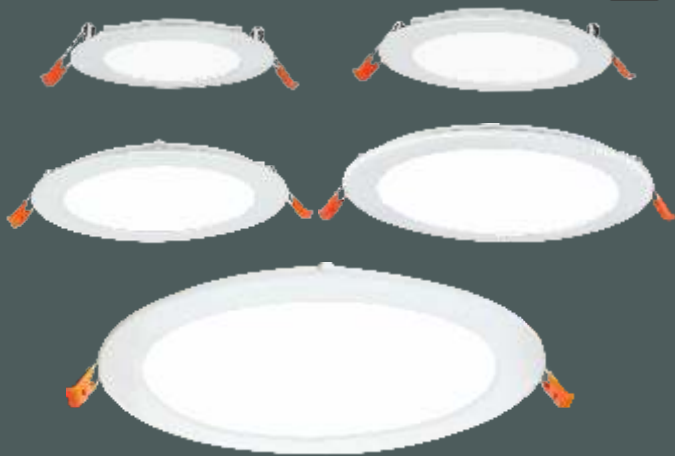

LED 2835


Non
Adjustable

Very Wide
Beam

Ceiling
Thickness


IP 20
Dust / Insect
protected

CRI
> 80

PF
> 0.90

4KV
Surge
Protection

(160-350V)
AC 50Hz

Colours Available
CW NW WW


Fluctuation Proof



2 YEAR
WARRANTY

FEATURES:

Edge Lit Downlight | Alluminium Die Cast Housing | Anti Glare Spot
Less Glow | Recessed Mounting

Classic - Panel Round

Cat No	Power	Colour	Dimensions (mm)		Lumen (lm)	Driver	Packing Case
			H=Height, CO=Cutout, OD=Outer Diameter				
L-761	6W	CW/NW/WW	H=18, CO=Ø108, OD=120		440	AL-5	20
L-762	12W	CW/NW/WW	H=18, CO=Ø136, OD=147		900	AL-47	20
L-763	15W	CW/NW/WW	H=18, CO=Ø157, OD=167		1100	AL-47	20
L-764	18W	CW/NW/WW	H=18, CO=Ø179, OD=189		1300	AL-47	20
L-765	22W	CW/NW/WW	H=18, CO=Ø208, OD=220		1600	AL-47	20

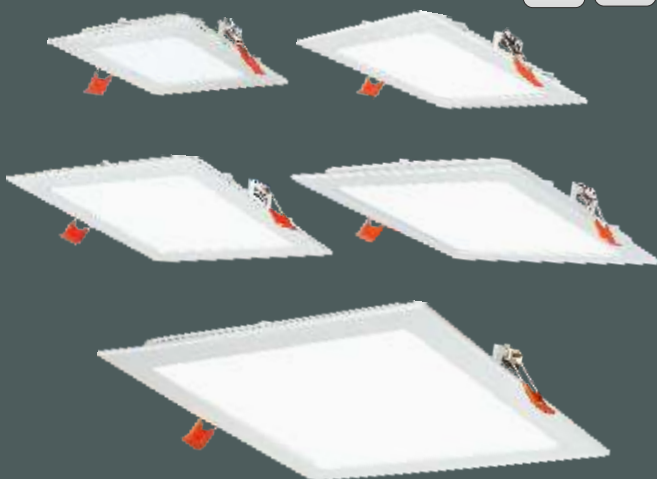3W
6W
12W
15W
18W
22W
PANEL
CLASSIC

LED 2835

Non Adjustable

Very Wide Beam



Ceiling Thickness

IP 20
Dust / Insect protected

CRI >80


PF >0.90

4KV Surge Protection

(160-350V) AC 50Hz

Colours Available
CW NW WW

Fluctuation Proof

2 YEAR WARRANTY
FEATURES:
Edge Lit Downlight | Alluminium Die Cast Housing | Anti Glare Spot Less Glow | Recessed Mounting
Classic - Panel Square

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-771	6W	CW/NW/WW	H=18, CO=Ø108XØ108, OD=120	440	AL-5	20
L-772	12W	CW/NW/WW	H=18, CO=Ø136XØ136, OD=147	900	AL-47	20
L-773	15W	CW/NW/WW	H=18, CO=Ø157XØ157, OD=167	1100	AL-47	20
L-774	18W	CW/NW/WW	H=18, CO=Ø179XØ179, OD=189	1300	AL-47	20
L-775	22W	CW/NW/WW	H=18, CO=Ø208XØ208, OD=220	1600	AL-47	20

FEATURES:
Backlit Downlight | Polycarbonate Housing Glare Free Light | Surface Mounting

Striker

Cat No	Power	Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen (lm)	Packing Case
L-209	3W	CW/NW/WW/R/G/B/P	H=13.5, OD=68	250*	80
L-203	6W	CW/NW/WW	H=15, OD=87	540	40

12W

18W

24W

PANEL

SWING/CRYSTAL



Swing



Reduce Opening Size



Increase Opening Size



Swing Crystal



Reduce Opening Size



Increase Opening Size

ADJUSTABLE PANEL



LED 2835



Wide Beam



Ceiling Thickness



IP20

Dust / Insect protected



CRI > 80



PF > 0.90



4KV Surge Protection



In-Built Driver



(180-350V) AC 50Hz



Colours Available

CW NW WW



Fluctuation Proof



2 YEAR WARRANTY

FEATURES:

Special Grade Polycarbonate Diffuser | Aluminium Housing | Uniform Bright Light | Adjustable Base Cutout | Anti-glare Diffuser Borderless | Recessed Mounting

Swing - Panel Round

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Beam Angle	Lumen (lm)	Packing Case
L-753	12W	CW/NW/WW	H=20, Min. CO=Ø50, Max. CO=Ø90, OD=120	135°	1200	20
L-755	18W	CW/NW/WW	H=20, Min. CO=Ø50, Max. CO=Ø130, OD=174	135°	1800	20
L-757	24W	CW/NW/WW	H=20, Min. CO=Ø50, Max. CO=Ø190, OD=226	135°	2400	12

FEATURES:

Prismatic Diffuser for twinkling effect | Aluminium Housing | Uniform Bright Light | Adjustable Base Cutout | Recessed Mounting

Swing (Crystal)- Panel Round

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Beam Angle	Lumen (lm)	Packing Case
L-758	12W	CW/NW/WW	H=35, Min. CO=Ø70, Max. CO=Ø92, OD=100	120°	1000	20
L-759	18W	CW/NW/WW	H=38, Min. CO=Ø70, Max. CO=Ø155, OD=167	120°	1500	20

* For Cool White Only

5W
7W
10W
POLO
SMART HERO

LED 2835

**Non
Adjustable**

**Very Wide
Beam**

**IP20
Dust / Insect
protected**

**CRI
>80**

**PF
>0.90**

**4KV
Surge
Protection**

**In-Built
Driver**

**(180-350V)
AC 50Hz**

Fluctuation Proof

**2 YEAR
WARRANTY**
FEATURES:

Backlit Downlight | Mounting : Recessed | Special grade Poly Carbonate Housing | High Voltage Protection upto 450V | Fits easily into Concealed Box of 100mm size

Smart Hero Standard

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-199	7W	CW/NW/WW/B/R/G/P/SB	H=32, CO=Ø90, OD=112	630*	100
L-191	10W	CW/NW/WW	H=32, CO=Ø90, OD=112	900*	100

Click Smart Hero - 3 in 1 - Colour Change on Click

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-221	7W	3 in 1 : CW - NW - WW	H=32, CO=Ø90, OD=112	630*	50
L-222	7W	3 in 1 : BL - RD - PK	H=32, CO=Ø90, OD=112	-	50
L-223	7W	3 in 1 : CW - BL - PR	H=32, CO=Ø90, OD=112	-	50
L-224	7W	3 in 1 : CW - RD - PK	H=32, CO=Ø90, OD=112	-	50

Polo

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-183	5W	CW/NW/WW/B/R/G/P/SB	H=22, CO=Ø85, OD=110	450*	100
L-128	7W	CW/NW/WW	H=22, CO=Ø85, OD=110	630*	100

*For Cool White Only

2W

7W

10W

DOWN
LIGHT


LED 2835


Non
Adjustable

Very Wide
Beam

IP 20
Dust / Insect
protected

CRI
> 80

PF
> 0.90

4KV
Surge
Protection

In-Built
Driver

(180-350V)
AC 50Hz

Fluctuation
Proof

2 YEAR
WARRANTY

BEST HERO:

Backlit Downlight | Polycarbonate Housing | Glare Free Light | Recessed Mounting into Concealed Box

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-205	7W	CW/NW/WW/B/R/G/P/SB	H=42, CO=Ø99, OD=112	770*	100
L-210	10W	CW/NW/WW	H=42, CO=Ø99, OD=112	900	100

EYE BALL:

Swivel Spot Light | Aluminium Housing | Recessed Mounting

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-62R	2W	CW/NW/WW	H=30, CO=Ø45, OD=52	100	AL-1	40



JEWEL:

Backlit Downlight | Polycarbonate Housing | Glare Free Light | Surface Mounting

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-159	2W	CW/NW/WW/B/R/G	H=16, CO=Ø35, OD=42	100*	160

*For Cool White Only

3W

6W

12W



JUNCTION BOX



HELLO



NANO



CHAMPION



LED 2835



Non Adjustable



Very Wide Beam



IP 20
Dust / Insect
protected



CRI
>80



PF
>0.90



4KV
Surge
Protection



In-Built
Driver



(180-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY



FEATURES:

Backlit Downlight | Polycarbonate Housing | Glare Free Light | Recessed Mounting into Junction Box

Junction Box

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
JB-3W	3W	CW/NW/WW/R/G/B/P/SB	H=34, CO=Ø45, OD=80	250*	120

Hello (Fit into Junction Box)

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-157	3W	CW/NW/WW/R/G/B/P/SB	H=33, CO=Ø44, OD=80	300*	120

Nano (Fit into Junction Box)

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-225	3W	CW/NW/WW/R/G/B/P	H=19.5, CO=Ø50, OD=76	240*	120

FEATURES:

Rimless Backlit Downlight | Polycarbonate Housing | Glare Free Light | Recessed Mounting into Junction Box

Champion Light

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-230	8W	CW/NW/WW/R/G/B/P/SB	H=50, CO=Ø45, OD=80	800*	120
L-208	12W	CW/NW/WW	H=47, CO=Ø85, OD=118	1200	40

*For Cool White Only

3W
8W
12W

LED 2835

**Non
Adjustable**

**Wide
Beam**


IP 20
Dust / Insect
protected

**CRI
> 80**

**PF
> 0.90**

4KV
Surge
Protection

(160-350V)
AC 50Hz

Colours Available
CW WW

Fluctuation Proof

2YEAR
WARRANTY

FEATURES:

Backlit Downlight | Aluminium Housing Provides Better Heat Dissipation
| Diffused Light | Black & White Body Colour | Reflector Rose Gold (RG),
White (W) & Nickel Black (NB) | Recessed Mounting

Aura - Downlight

Cat No	Power	Reflector	Body Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-198	8W	RG / W / NB	W / B	H=41, CO=Ø80, OD=87	650	AL-19	20
L-187	12W	RG / W / NB	W / B	H=44, CO=Ø82, OD=101	1000	AL-15	20

FEATURES:

LED Pathlight- Swivel Light | Polycarbonate
Housing | Anti Glare | For direct fit into 5"x3" box
Recessed Mounting


Path Light


Cat No	Power	Colour	Dimensions (mm) H=Height, B=Breadth, L=Length	Lumen (lm)	Packing Case
L-17	3W	CW/WW/B/R/G	H=24, B=88, L=155	210*	40

* For Cool White Only

6W
7W
10W

UNO SPOT

HERO SPOT

SHINE SPOT

LED 2835

Adjustable

**Narrow
Beam**

IP20
Dust / Insect
protected

CRI
>80

PF
>0.90

4KV
Surge
Protection

**In-Built
Driver**

(180-350V)
AC 50Hz

Fluctuation Proof

**2 YEAR
WARRANTY**
FEATURES:
Swivel Spot Light with lens | Aluminium Housing | Adjustable Focus | Recessed Mounting
UNO Spot - With Lens

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Packing Case
L-212	6W	CW/NW/WW	H=60, CO=Ø75, OD=86	540	24°	20
L-228	7W	CW/NW/WW	H=68, CO=Ø75, OD=86	-	24°	20
L-214	10W	CW/NW/WW	H=68, CO=Ø75, OD=86	900	24°	12

Hero Spot - With Lens

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Packing Case
L-213	7W	CW/NW/WW	H=45, CO=Ø90, OD=105	630	48°	50

Shine Spot - With Lens

Cat No	Power	Colour	Body Colour	Reflector	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Packing Case
L-229	10W	CW/NW/WW	Black,White	RG/NB/Silver	H=32, CO=Ø90, OD=112	900	36°	50

3W
7W
12W
14W
21W

LED 2835

Adjustable

**Narrow
Beam**


IP20
Dust / Insect
protected

CRI
>80

PF
>0.90

4KV
Surge
Protection

**In-Built
Driver**

(180-350V)
AC 50Hz

Fluctuation Proof

**2YEAR
WARRANTY**
FEATURES:
**Swivel Spot Light with 48 degree lens | Polycarbonate Housing |
Adjustable Focus | Recessed Mounting**
Taurus - Round Spot Light
7W & 12W - Most Suitable for Concealed Box - 3.5"

Cat No	Power	Colour	Body Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-318	3W	CW/NW/WW/B/R/G	W / B	H=40, CO=Ø65, OD=75	270*	50
L-320	7W	CW/NW/WW/B/R/G	W / B	H=50, CO=Ø88, OD=99	600*	50
L-324	12W	CW/NW/WW/B/R/G	W / B	H=50, CO=Ø89, OD=109	1050*	50

Taurus - Square Spot Light

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-325	7W	CW/NW/WW(Single)	H=40, L=92.5, B=92.5, CO=Ø82X82	600*	50
L-326	14W	CW/NW/WW(Double)	H=40, L=172, B=92.5, CO=Ø158X82	1200*	50
L-327	21W	CW/NW/WW(Triple)	H=40, L=252, B=92.5, CO=Ø238X82	1800*	50

8W

12W

16W



COB



Non
Adjustable



36°
Narrow
Beam



IP 20
Dust / Insect
protected



CRI
> 80



PF
> 0.90




4KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW NW WW



Fluctuation Proof



2 YEAR
WARRANTY

FEATURES:


COB Downlight | Aluminum Housing | Recessed Light | Black & White Body Colour | Reflector Rose Gold(RG), White(W) & Nickel Black(NB) | Beam Angle 36°

Winner - COB

Cat No	Power	Reflector	Body Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-173	8W	RG / W / NB	W / B	H=40, CO=Ø78, OD=86	800	AL-14	20
L-186	12W	RG / W / NB	W / B	H=52, CO=Ø78, OD=88	1200	AL-15	20
L-175	16W	RG / W / NB	W / B	H=52, CO=Ø95, OD=102	1600	AL-16	12

Click Winner - 3 in 1 - Colour Change on Click

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-200	16W	3 in 1 : CW-NW-WW	H=52, CO=Ø95, OD=102	1600	AL-16	8



6W

12W

15W



SOLO



JAZZ



COB



Non
Adjustable



Narrow
Beam



IP20
Dust / Insect
protected



CRI
> 80



PF
> 0.90




4KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW NW WW



Fluctuation Proof



2YEAR
WARRANTY

FEATURES:

Deep COB Downlight | Aluminium Housing | New Innovative Design
Glare free Light | Recessed Downlight | Narrow Beam


Solo - COB

Cat No	Power	Colour	Body Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-330	6W	CW/NW/WW	W / B	H=62, CO=Ø58, OD=65	600	AL-12	20
L-331	12W	CW/NW/WW	W / B	H=76, CO=Ø76, OD=85	1200	AL-15	12
L-332	15W	CW/NW/WW	W / B	H=88, CO=Ø83, OD=92	1500	AL-16	12

Jazz - COB NEW

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-335	12W	CW/NW/WW	H=77, CO=Ø78, OD=84	1200	AL-15	12

Line Drawing :



3W
6W
12W
18W

COB

**Non
Adjustable**

**Narrow
Beam**

**IP 20
Dust / Insect
protected**

**CRI
> 80**

**PF
> 0.90**

**4KV
Surge
Protection**

**(160-350V)
AC 50Hz**

**Colours Available
CW NW WW**

Fluctuation Proof

**2 YEAR
WARRANTY**
FEATURES:

Deep COB Downlight | Aluminium Housing | Diamond Cut reflector
Recessed Downlight | Narrow Beam | Optical Lens

Sky - COB

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Driver	Packing Case
L-303	6W	CW/NW/WW	H=70, CO=Ø75, OD=85	540	24°	AL-12	20
L-305	12W	CW/NW/WW	H=85, CO=Ø95, OD=105	1120	24°	AL-15	12
L-313	18W	CW/NW/WW	H=95, CO=Ø130, OD=140	1500	24°	AL-16	8


Sunny - COB

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-322	3W	CW/NW/WW	H=36, CO=Ø55, OD=70	270	50

6W

10W

15W

20W



COB



Adjustable



Narrow
Beam



IP20
Dust / Insect
protected



CRI
>80



PF
>0.90




4KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW NW WW



Fluctuation Proof



2YEAR
WARRANTY

FEATURES:

Tiltable Focus Downlight
reflector Recessed Downlight


Aluminium Housing
Narrow Beam

Diamond Cut
Optical Lens

Solitaire - COB

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Driver	Packing Case
L-174	6W	CW/NW/WW	H=55, CO=Ø75, OD=86	430	24°	AL-12	20
L-176	10W	CW/NW/WW	H=70, CO=Ø95, OD=110	740	24°	AL-41	12
L-178	10W	CW/NW/WW	H=70, CO=Ø75, OD=86	740	24°	AL-41	12
L-166	15W	CW/NW/WW	H=70, CO=Ø95, OD=110	1150	24°	AL-16	8
L-169	20W	CW/NW/WW	H=97, CO=Ø95, OD=110	1420	36°	AL-81	8

Line Drawing :



6W
12W
18W

6W DAZZLE

12W DAZZLE

18W DAZZLE

COB

Adjustable

**Narrow
Beam**


IP 20
Dust / Insect
protected

CRI
> 80

PF
> 0.90

4KV
Surge
Protection

(160-350V)
AC 50Hz

Colours Available
CW NW WW

Fluctuation Proof

**2 YEAR
WARRANTY**
FEATURES:
**Tiltable Focus Spot Light | Aluminium Housing | Narrow Beam |
Optical Lens | Anti Glare | Recessed Mounting**
Dazzle - COB Spot with Lens

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Packing Case
L-341	6W	CW/NW/WW	H=49, CO=Ø75, OD=91	600	36°	20
L-344	12W	CW/NW/WW	H=52, CO=Ø95, OD=110	1200	36°	12
L-347	18W	CW/NW/WW	H=67, CO=Ø116, OD=136	1800	36°	12

6W

15W

24W

30W

40W



COB



Adjustable



Narrow Beam



IP20
Dust / Insect
protected



CRI
> 80



PF
> 0.90



4KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW NW WW



Fluctuation Proof



2YEAR
WARRANTY


FEATURES:

Deep COB Downlight | Aluminium Housing | Diamond Cut Reflector
Adjustable Focus | Recessed Mounting

Sigma - COB

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Driver	Packing Case
L-315	6W	CW/NW/WW	H=68, CO=Ø65, OD=78	400	24°	AL-12	20
L-316	15W	CW/NW/WW	H=88, CO=Ø87, OD=99	1400	36°	AL-15	12
L-319	24W	CW/NW/WW	H=95, CO=Ø108, OD=122	2400	36°	AL-92	8
L-317	30W	CW/NW/WW	H=95, CO=Ø108, OD=122	2600	36°	AL-92	8
L-328	40W	CW/NW/WW	H=115, CO=Ø134, OD=142	3800	36°	AL-78	8

Line Drawing :



10W 20W 25W 30W 35W

COB

Adjustable

**Narrow
Beam**

**IP20
Dust / Insect
protected**


**CRI
>80**

**PF
>0.90**

**4KV
Surge
Protection**

**In-Built
Driver**

**(160-350V)
AC 50Hz**

Colours Available
CW NW WW

Fluctuation Proof

**2 YEAR
WARRANTY**
FEATURES:
Focus Spotlight | Aluminium Housing | 360 Degree Adjustable | Narrow Beam Optical Lens | Beam Angle 36°
Pearl - (Track Light)

Cat No	Power	Colour	Body Colour	Dimensions (mm) H=Height, L=Length, OD=Outer Diameter	Lumen (lm)	Packing Case
L-468	10W	CW/NW/WW	W / B	H=130, L=128, OD=50	750	12
L-469	20W	CW/NW/WW	W / B	H=150, L=145, OD=60	1800	12
L-470	25W	CW/NW/WW	W / B	H=150, L=157, OD=70	2400	12
L-472	30W	CW/NW/WW	W / B	H=150, L=157, OD=70	2800	12
L-471	35W	CW/NW/WW	W / B	H=162, L=175, OD=80	3200	12

Track Channel - Surface
L-149
1/2M LED Track Channel (Black/White)
Size(mm) : L=500, B=42, H=20
Packing Case : 30

L-148
1M LED Track Channel (Black/White)
Size(mm) : L=1000, B=42, H=20
Packing Case : 30

L-803
2M LED Track Channel (Black/White)
Size(mm) : L=2000, B=42, H=20
Packing Case : 30

Direct Jointer for Track Channel
L-824
1Unit LED Track Jointer (Black/White)
Packing Case : On request

Corner Jointer for Track Channel
L-825
1Unit LED Corner Jointer (Black/White)
Packing Case : On request

10W 20W 30W

COB

Adjustable

Narrow Beam


IP20
Dust / Insect protected

CRI > 80

PF > 0.90

4KV Surge Protection

(180-350V) AC 50Hz

Colours Available
CW NW WW

Fluctuation Proof

2 YEAR WARRANTY
FEATURES:
COB Spotlight | Focus Spotlight | Aluminium Housing | 360° Adjustable | Narrow Beam | Optical Lens
Diamond - Spot Light (Surface) - White Body


Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Beam Angle	Lumen (lm)	Packing Case
L-451	10W	CW/NW/WW	H=122, L=128, OD=50	24°	900	12
L-453	20W	CW/NW/WW	H=145, L=155, OD=70	24°	1800	8
L-455	30W	CW/NW/WW	H=155, L=175, OD=80	24°	2600	8

Diamond - Spot Light (Surface) - Black Body

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Beam Angle	Lumen (lm)	Packing Case
L-452	10W	CW/NW/WW	H=122, L=128, OD=50	24°	900	12
L-454	20W	CW/NW/WW	H=145, L=155, OD=70	24°	1800	8
L-456	30W	CW/NW/WW	H=155, L=175, OD=80	24°	2600	8

Pearl - Spot Light (Surface)

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Beam Angle	Lumen (lm)	Packing Case
L-474 NEW	20W	CW/NW/WW	H=134, L=145, OD=60	36°	1800	8

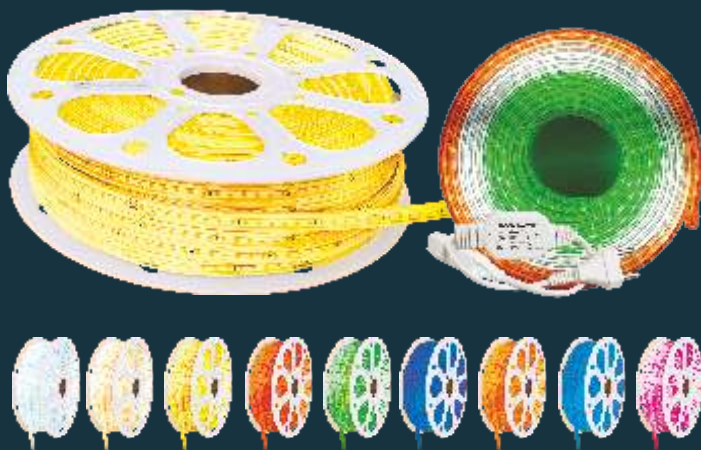

FEATURES: AC LED Strip | 120 LED per meter | 24 Lumen LED for brighter output | Even Light spread with 120 Degree viewing angle

Festiva - Rope Light

Cat No	Power	Length	Colour	LED	Packing Case
L-951	160W-(8W/mtr)	20 Meter	CW/WW	SMD 2835-120 LED/mtr	5
L-953	360W-(8W/mtr)	45 Meter	CW/WW/R/G/B/O/IB/P	SMD 2835-120 LED/mtr	4

Tiranga - Rope Light

Cat No	Power	Length	Colour	LED	Packing Case
L-955	72W-(8W/mtr)	9 Meter	Orange-White-Green	SMD 2835-120 LED/mtr	10
L-958	144W-(8W/mtr)	18 Meter	Orange-White-Green	SMD 2835-120 LED/mtr	8

A.C. LED Strip Plug & Accessories

AL-952

Rope Light A.C. Plug

End Caps

Power : Upto 400W

Packing : Plug 100, End cap 200



Rope Light Adapter Pro & Accessories

AL-950

Rope Light Adapter Pro

End Caps

Current : 4Amp

Packing : Adapter 50, End cap 100



Rope Light Jointer

AL-951

Rope Light Jointer

Packing Case : As per order



A.C. LED Strip Pin Pack

AL-954

Rope Light 6mm Pin

Packing Case : As per order



A.C. LED Strip Clamps Pack

AL-953

Rope Light Clamps Pack of 100

Packing Case : 100




8mm PCB LED STRIP LIGHT
SPARKLE
5mm PCB SLIM LED STRIP LIGHT
SPARKLE Slim
SPARKLE Pro


FEATURES: 5 Meter Length LED Strip | 100% Copper wiring on flexible PCB | Superior Adhesive for Easy Installation | With Stand High Voltage upto 440V | High Lumen LED used

Sparkle - 60 LED / Meter

Cat No	Voltage	Colour	PCB	LED	Lumen (lm)/m	Use with	Packing Case
L-801	12V	CW/NW/WW	8mm	SMD 2835-60 LED/mtr	750	AL-110A	50
L-801	12V	B/R/G/P/PR/GY/SB	8mm	SMD 2835-60 LED/mtr	—	AL-110A	50

Sparkle - 120 LED / Meter

Cat No	Voltage	Colour	PCB	LED	Lumen (lm)/m	Use with	Packing Case
L-804	12V	CW/NW/WW	8mm	SMD 2835-120 LED/mtr	1050	AL-125A	50
L-802	12V	B/R/G/P/SB	8mm	SMD 2835-120 LED/mtr	—	AL-125A	50

Sparkle - 180 LED / Meter

Cat No	Voltage	Colour	PCB	LED	Lumen (lm)/m	Use with	Packing Case
L-806	12V	CW/NW/WW	10mm	SMD 2835-180 LED/mtr	1500	AL-141A	50

Sparkle/Sprkle Pro - 240 LED / Meter



Cat No	Voltage	Colour	PCB	LED	Lumen (lm)/m	Use with	Packing Case
L-808	12V	CW/NW/WW	10mm	SMD 2835-240 LED/mtr	2000	AL-127A	50
L-808P	12V NEW	CW/NW/WW	10mm	SMD 2835-240 LED/mtr	2000	AL-127A	50
L-809	12V	B/R/G/P/SB	10mm	SMD 2835-240 LED/mtr	—	AL-127A	50
L-812	24V NEW	CW/NW/WW	10mm	SMD 2835-240 LED/mtr	2500	AL-143A	50

Sparkle Slim - 120 LED / Meter

Cat No	Voltage	Colour	PCB	LED	Lumen (lm)/m	Use with	Packing Case
L-805	12V	CW/NW/WW	5mm	SMD 2835-120 LED/mtr	800	AL-125A	50

(Suitable for profile lighting)

MRP does not include cost of power supply | For power supply refer to page no. 25

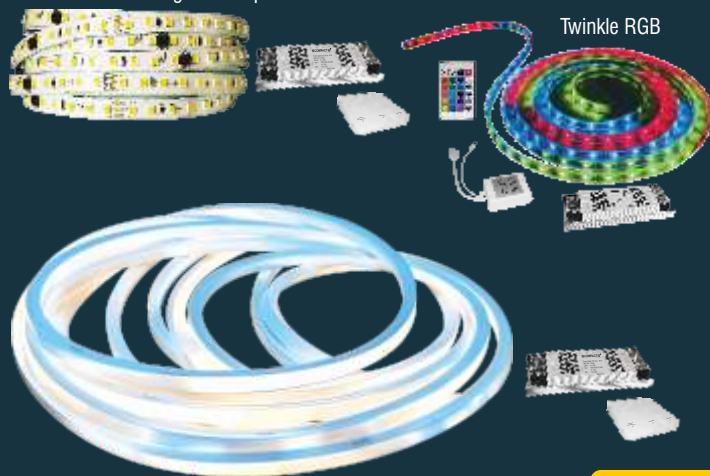Pulse - Water Flowing LED Strip

Aqua - Water Flowing LED Light with Waterproof Profile
Combo Pack

FEATURES:

Water Flowing LED strip lights with Controller & Driver | Speed and Brightness adjustment | Multiple lighting effects | Even light spread with 120 Degree viewing angle | Flame Resistant

Pulse - 120 LED / Meter (Water Flowing LED Strip)


Cat No	Voltage	Colour	PCB	LED	Length	Use with	Packing Case
L-844	12V	CW/NW/WW	8mm	SMD 2835-120 LED/mtr with Controller & Driver	5mtr.	AL-241A	10
L-845	12V	CW/NW/WW	8mm	SMD 2835-120 LED/mtr with Controller & Driver	10mtr.	AL-143A	10

Twinkle - RGB Color Changing - 30 LED / Meter

Cat No	Voltage	Colour	LED	Length	Use with	Packing Case
L-921	12V	RGB	SMD 5050-30 LED/mtr with Controller & Driver	5mtr.	AL-141A	10

Aqua - 120 LED / Meter (Water Flowing LED Strip with Waterproof Profile)
IP 65
Dust / Water
Proof
protected

Cat No	Voltage	Colour	PCB	LED	Length	Use with	Packing Case
L-848	12V	CW/NW/WW	8mm	SMD 2835-120 LED/mtr with Controller & Driver	5mtr.	AL-241A	10
L-849	12V	CW/NW/WW	8mm	SMD 2835-120 LED/mtr with Controller & Driver	10mtr.	AL-143A	10

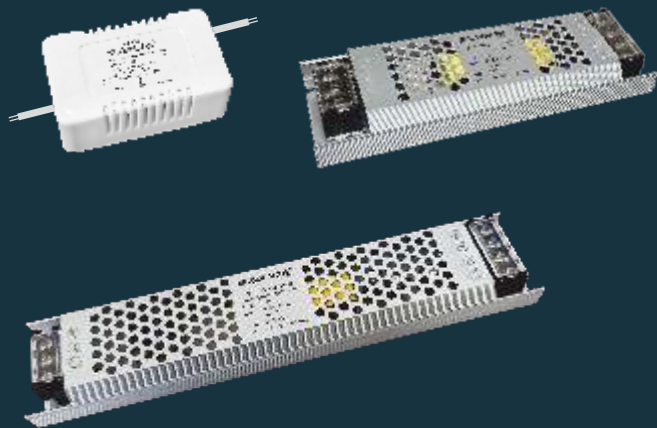

FEATURES:

PROTECTION AGAINST - Wide Voltage operating range 180 to 300 V | Surge Protection upto 4 KV | Protection from Short-Circuit | Overloads | Overheating | Exceeding acceptable supply voltage | With Stands High Voltage upto 440V

Alpha - Power Supply for LED Strip Light

Cat No	Power	Output Current	Constant Voltage Output	Dimensions (mm)	Packing Case
AL-115A	9W	750mA	11-13V	L=44, B=25, H=22	100
AL-110A	18W	1.5A	11-13V	L=58, B=35, H=22	100
AL-125A	36W	3A	11-13V	L=132, B=53, H=22	50
AL-141A	60W	5A Max	11-13V	L=132, B=53, H=22	50
AL-127A	120W	10A Max	11-13V	L=144, B=53, H=22	50
AL-135A	200W	16.5A	11-13V	L=235, B=53, H=22	50
AL-136A	300W	25A	11-13V	L=256, B=53, H=22	50
AL-241A	60W	2.5A	23-24V	L=132, B=53, H=22	50
AL-143A	120W	5A Max	24V	L=169, B=53, H=22	50

All power supply are available in waterproof price on request

10 Meter
4W
6W
JHILMIL

JHILMIL PIXEL


FEATURES: Still LED Festive Chain | Copper Wire | Unique Pixel LED 5mm | 46 LED in 10 Meter | High Brightness | With 6 Lighting Effects*

Jhilmil 5mm - LED Festive String Light - Single Colour

Cat No	Power	Colour	Number of LED	Wire Length	Packing Case
L-971	4W	WW/CW/Green/Blue/Red/Pink	46	10 Meter	50

Jhilmil 5mm - LED Festive String Light - Multi Colour with Multiple function

Cat No	Power	Colour	Number of LED	Wire Length	Packing Case
L-971M	4W	Multi Colour	46	10 Meter	50

FEATURES: LED Festive Chain | With 6 Lighting Effects* | Copper Wire | Unique Pixel LED 8mm | 46 LED in 10 Meter | High Brightness

Jhilmil Pixel 8mm - LED Festive String Light - Single Colour & Multi Colour with Multiple function

Cat No	Power	Colour	Number of LED	Wire Length	Packing Case
L-981	6W	Single & Multi Colour	46	10 Meter	50

*For multi colour only

1.2W

3W

5W

TABLE LAMP/
NIGHT LIGHT



LED 2835



Beam
Angle



Adjustable




IP20
Dust / Insect
protected



CRI
> 80



PF
> 0.90



(180-350V)
AC 50Hz



Colours Available
CW-NW-WW



Fluctuation Proof



1 YEAR
WARRANTY

FEATURES:

Portable and Rechargeable Table Lamp | Touch Control Colour Adjustable on Click (CW-NW-WW) | Stepless Dimming-Long Press the Power Key to Adjust Brightness | Equipped with Charging USB Cable | Colour Temperature : 3000K-4000K-6500K

Prism - LED Rechargeable Table Lamp

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Packing Case
L-104	5W	CW-NW-WW	H=560, L=118, B=288	10
L-105	3W	CW-NW-WW	H=480 L=90, B=134	10

Selfie - LED Rechargeable Table Lamp

L-102	5W	CW-NW-WW	H=495 L=120, B=120	10
-------	----	----------	--------------------	----

Stella - LED Portable Night Light

L-103	1.2W	CW-NW-WW	H=125, L=85	10
-------	------	----------	-------------	----

Buddy- Table Lamp (for bulb) **NEW**

Cat No	Body Colour	Holder Type	Dimensions (mm) H=Height, L=Length, B=Breadth	Packing Case
L-126	Blue	E-27	H=295, Dia=143mm	6

7W
9W
12W
20W
24W
30W
36W
42W
60W
BATTEN
MARINA
MARINA
TULIP

LED 2835


Non Adjustable

IP20
Dust / Insect
protected

CRI
>80

PF
>0.90

4KV
Surge
Protection

In-Built
Driver

(160-350V)
AC 50Hz

Colours Available
CW WW

Fluctuation Proof

1 YEAR
WARRANTY

FEATURES: LED Batten | Polycarbonate Extruded body with glare free diffuser | Surface Mounted

Marina - Square

Cat No	Power	Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen (lm)	Packing Case
L-613	7W	CW/NW/WW	L=207, B=25, H=36	770	50
L-599	9W	CW/NW/WW	L=311, B=25, H=36	990	30
L-600	12W	CW/NW/WW	L=580, B=24, H=33	1320	30
L-617	20W	CW	L=1100, B=25, H=36	2000	50
L-617	20W	NW/WW/B/R/G/P	L=1100, B=25, H=29	—	50
L-612	20W	O-W-G Tiranga	L=1100, B=25, H=29	—	30
L-625	20W	CW/NW/WW	L=585, B=25, H=36	2000	30
L-602	24W	CW/NW/WW	L=1185, B=25, H=36	3000	30
L-628	30W	CW/NW/WW	L=1185, B=25, H=36	3200	30

Marina Pro - Square

L-601P	24W	CW/NW/WW	L=1100, B=25, H=29	2500	30
--------	-----	----------	--------------------	------	----

Marina - Tulip

Cat No	Power	Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen (lm)	Packing Case
L-620	12W	CW/NW/WW	L=311, B=25, H=36	1320	25
L-156	24W	CW/NW/WW	L=610, B=25, H=36	3000	25
L-605	36W	CW/NW/WW	L=1185, B=25, H=36	5000	30
L-607	42W	CW/NW/WW	L=1185, B=25, H=36	5800	30
L-606 	60W	CW/NW/WW	L=1185, B=25, H=36	7000	30

Marina Square Click - 3 in 1 - Colour Change on Click

L-627	20W	CW-NW-WW	L=1100, B=25, H=36	2200	25
-------	-----	----------	--------------------	------	----

20W
24W
40W
48W
60W
65W
LINEAR
LIGHT
LINEAR LIGHT
DOLPHIN LIGHT

LED 2835

Non Adjustable


IP20

Dust / Insect protected



CRI >80

PF >0.90

4KV Surge Protection

In-Built Driver

(160-350V) AC 50Hz


Colours Available

CW WW

Fluctuation Proof

1 YEAR WARRANTY
FEATURES:
Metal Housing with glare free diffuser | High Lumen High performance Surface Mounted
Linear Light

Cat No	Power	Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen (lm)	Packing Case
L-611	24W	CW/NW/WW	L=625, B=30, H=75	2400	10
L-608	48W	CW/NW/WW	L=1200, B=30, H=75	4800	10
L-610	60W	CW/NW/WW	L=1200, B=30, H=75	6000	10

FEATURES:
Polycarbonate Extruded body with glarefree diffuser | Surface Mounted
Dolphin Light - Flat Surface Mounted, Acrylic Diffuser

Cat No	Power	Colour	Dimensions (mm) L=Length, H=Height	Lumen (lm)	Packing Case
L-618	20W	CW/NW/WW	L=620, H=26	2400	20
L-619	40W	CW/NW/WW	L=1175, B=75, H=26	5000	10
L-623	65W	CW/NW/WW	L=1175, B=75, H=26	7000	10

0.5W

2.8W

3W

5W

7W

9W

12W

20W

BULB



Classic
Bulb

Cat No	Power	Colour	Lamp Holder	Lumen (lm)	Packing Case
GL-0.5C	0.5W	Color Changing	B22	–	200
GL-0.5	0.5W	CW/WW/B/R/G/O	B22	–	200
GL-3	3W	CW	B22, E27	300	100
GL-5	5W	CW	B22, E27	500	100
GL-7	7W	CW	B22, E27	650	100
GL-9	9W	CW	B22, E27	850	100
GL-9 (2) MSV	9W	CW	B22, E27	850	150
GL-12	12W	CW	B22, E27	1200	50
GL-14	14W	CW	B22, E27	1260	50

Standard
Bulb

Cat No	Power	Colour	Lamp Holder	Lumen (lm)	Packing Case
SL-20	20W	CW	B22	1940	20/50
SL-26	26W	CW	B22	–	20

Coloured
Bulb

Cat No	Power	Colour	Lamp Holder	Lumen (lm)	Packing Case
CB-2.8	2.8W	WW/B/R/G/P/O	B22	–	100

9W

10W

12W

15W

20W

30W

40W

50W

60W

BULB



JUMBO



JUMBO Pro



EMERGENCY



LED 2835

IP 20
Dust / Insect
protectedCRI
>80PF
>0.904KV
Surge
Protection(180-350V)
AC 50Hz

Fluctuation Proof

QUALITY
1YEAR
WARRANTY

Jumbo - Bulb

Cat No	Power	Colour	Lamp Holder	Lumen (lm)	Packing Case
JL-15	15W	CW	B22	1575	20/50
JL-20	20W	CW	B22	2100	20/50
JL-30	30W	CW	B22	3000	20
JL-40	40W	CW	B22	4200	20
JL-50	50W	CW	B22	5400	10
JL-60	60W	CW	B22	6000	10
JL-80 NEW	80W	CW	B22	7200	10

Jumbo Pro - Bulb

Cat No	Power	Colour	Lamp Holder	Lumen (lm)	Packing Case
JLP-30	30W	CW	B22	3000	20
JLP-40	40W	CW	B22	3600	20
JLP-50	50W	CW	B22	4500	10
JLP-60	60W	CW	B22	-	10

FEATURES:

Over-Charging Protection | Battery with BMS System | Battery Deep Discharge Protection | Actual lumen may vary by 10%

Emergency LED Bulb & Pro

Cat No	Power	Colour	Lamp Holder	Battery	Backup upto	Lumen (lm)	Packing Case
EB-9P	9W	CW/WW	B22	-	3 Hours	upto 900 on AC, 300 on DC	30
EB-10	10W	CW/WW	B22	2000mAH	4 Hours	upto 1000 on AC, 300 on DC	20
EB-12P	12W	CW/WW	B22	2000mAH	4 Hours	upto 1200 on AC, 300 on DC	20
EB-20	20W	CW/WW	B22	2200mAH	3 Hours	1800 on AC, 550 on DC	20

20W

1X20

2X20

TUBE/BOX
TYPE

LIGHT/
FITTING

POLYCARBONATE TUBE



LED 2835


Non
Adjustable


IP20

Dust / Insect
protected


CRI
> 80

PF
> 0.90

4KV
Surge
Protection

In-Built
Driver

(180-350V)
AC 50Hz

Colours Available
CW WW


Fluctuation Proof

LED Tube - With Polycarbonate Housing

Cat No	Power	Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen (lm)	Packing Case
L-35	20W	CW/WW	L=1198, B=32, H=26	2200	25

LED Box Type Fitting - Powder Coated Sheet Steel Fixture for LED Tube

Cat No	Power	Dimensions (mm) L=Length, H=Height	Packing Case
L-410T	1X20W	H=30, L=1230	10
L-412T	2X20W	H=40, L=1230	10

Reflector For LED Box Type Fixture

Cat No	Size	Dimensions (mm) L=Length, B=Breadth, H=Height	Packing Case
RW-220	Double	L=1226, B=190, H=70	10

Gartex Reflector For LED Batten

Cat No	Size	Dimensions (mm) L=Length, B=Breadth, H=Height	Packing Case
L-413	Double	L=1226, B=190, H=70	10

DRIVERS



Cat No	Power	Constant Current Output	Output Voltage	IP	Dimensions (mm) L=Length, B=Breadth, H=Height
AL-1	1W	300mA	2-5V	IP20	L=35, B=25, H=23
AL-2	2-5W	300mA	3-18V	IP65	L=35, B=25, H=23
AL-4	4-8W	130mA	24-72V	IP65	L=44, B=24, H=22
AL-5	5-9W	120mA	54-72V	IP20	L=44, B=24, H=22
AL-12	6W	150mA	36V	IP20	L=58, B=35, H=22
AL-14	8W	160mA	27-45V	IP20	L=44, B=24, H=22
AL-15	12W	140mA	66-78V	IP20	L=58, B=35, H=21
AL-16	15W	170mA	66-78V	IP20	L=58, B=35, H=21
AL-18	16W	190mA	72-78V	IP20	L=58, B=35, H=21
AL-19	8W	100mA	54-72V	IP20	L=44, B=24, H=22
AL-20	18W	165mA	90-99V	IP20	L=58, B=35, H=21
AL-21	20W	240mA	66-81V	IP20	L=58, B=35, H=21
AL-22	24W	220mA	90-99V	IP20	L=58, B=35, H=21
AL-24	5/6W	200mA	12-30V	IP20	L=44, B=24, H=22
AL-25	9W	125mA	72-78V	IP65	L=44, B=24, H=22
AL-39	9W	220mA	34-44V	IP20	L=43, B=40, H=27
AL-40	10W	300mA	34-44V	IP20	L=43, B=40, H=27
AL-41	9/12W	240mA	34-44V	IP20	L=88, B=38, H=22
AL-44	11/12W	300mA	34-44V	IP20	L=88, B=38, H=22
AL-47	12-22W	300mA	24-72V	IP20	L=88, B=38, H=22
AL-48	25W	410mA	48-60V	IP20	L=88, B=38, H=22
AL-70	45/50W	750mA	54-72V	IP65	L=85, B=32, H=24
AL-30	30W	270mA	104-112V	IP20	L=88, B=38, H=22
AL-73	30W	680mA	34-48V	IP20	L=137, B=54, H=37
AL-72	15/17W	390mA	34-44V	IP20	L=88, B=38, H=22
AL-74	30W	560mA	24-48V	IP20	L=137, B=54, H=37
AL-78	30W/36W	750mA	76-42V	IP65	L=82, B=29, H=22
AL-77	35W	850mA	34-44V	IP20	L=132, B=54, H=37
AL-81	20W	450mA	34-44V	IP20	L=110, B=42, H=23
AL-82	18/22W	520mA	34-44V	IP20	L=110, B=42, H=23
AL-88	30W	650mA	36V	IP20	L=85, B=32, H=24
AL-89	45W	600mA	68-78V	IP65	L=85, B=38, H=24
AL-104	100W	1500mA	54-60V	IP65	L=152, B=30, H=28
AL-126	40W	420mA	60-78V	IP20	L=88, B=38, H=22
AL-124	40W	380mA	90-99V	IP20	L=88, B=38, H=22
AL-125	40W	420mA	68-78V	IP20	L=81, B=24, H=22
AL-129	30W	390mA	99-108V	IP20	L=88, B=38, H=22
AL-130	30W	390mA	60-78V	IP20	L=81, B=24, H=22
AL-92	30W	250mA	100-108V	IP20	L=81, B=24, H=22
AL-26	24W	200mA	105V	IP20	L=81, B=24, H=22
AL-28	20W	240mA	66-81V	IP20	L=50, B=35, H=21
AL-27	20W	150mA	108V	IP20	L=50, B=35, H=21
AL-29	50W	600mA	54-72V	IP65	L=85, B=32, H=24

Lava - Constant Current LED Driver - IP20 For All Your Replaceable Driver Demand | Compatible with any Brand Fixtures

Cat No	Power	Constant Current	Constant Voltage Output	IP	Dimensions (mm) L=Length, B=Breadth, H=Height	Packing Case
AL-31L	2W-5W	300mA	3-18V	IP65	L=35, B=25, H=23	50
AL-33L	6W-9W	150mA	27-45V	IP65	L=58, B=35, H=20	50
AL-38L	22W-30W	600mA	27-45V	IP20	L=110, B=42, H=26	50
AL-39L	31W-40W	750mA	27-45V	IP20	L=110, B=42, H=26	50
AL-44L	45W-60W	750mA	54-78V	IP65	L=85, B=32, H=24	50
AL-46L	45W-60W	1200mA	24-42V	IP65	L=85, B=32, H=24	50
AL-48L	60W-100W	950mA	60-95V	IP65	L=83, B=68, H=35	50

All drivers can be made waterproof on request

25W
40W
60W
80W
MATRIX
SLEEK

(1'x1')

(2'x2')

LED 2835

Non Adjustable

Very Wide Beam

Ceiling Thickness


IP20
Dust / Insect protected

CRI > 80

PF > 0.90

4KV Surge Protection

(160-350V) AC 50Hz

Colours Available
CW YW WW

Fluctuation Proof

2 YEAR WARRANTY
FEATURES:

CRCA powder coated white Body after Anti-rust Treatment | High performance | LED Driver with short circuit protection | Recessed mounted | Highly Translucent diffuser for glare free symmetric light distribution

Matrix Sleek - 1'X1'

Cat No	Power	Size	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-383A	25W	(1'x1')	H=37, CO=Ø285X285, OD=295X295	2700	AL-48	12

Matrix Sleek - 2'X2' Armstrong Ceiling

Cat No	Power	Size	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-388A	40W	(2'x2')	H=37, CO=Ø580X580, OD=596X596	5200	AL-126	6
L-389A	60W	(2'x2')	H=37, CO=Ø580X580, OD=596X596	7800	AL-129	6
L-390A	80W	(2'x2')	H=37, CO=Ø580X580, OD=596X596	8500	AL-126X2	6

Matrix Sleek - 2'X2' POP Ceiling

Cat No	Power	Size	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-388B	40W	(2'x2')	H=37, CO=Ø580X580, OD=596X596	5200	AL-126	6
L-389B	60W	(2'x2')	H=37, CO=Ø580X580, OD=596X596	7800	AL-129	6
L-390B	80W	(2'x2')	H=37, CO=Ø580X580, OD=596X596	8500	AL-126X2	6

25W

40W

60W

80W

MATRIX
SURFACE


(1'x1')



(2'x2')



LED 2835


Non
Adjustable

Very Wide
Beam


IP20
Dust / Insect
protected

CRI
> 80

PF
> 0.90

4KV
Surge
Protection

(160-350V)
AC 50Hz

Colours Available
CW NW WW


Fluctuation Proof


2 YEAR
WARRANTY

FEATURES:

CRCA powder coated white Body after Anti-rust Treatment | Surface mounted | High performance | LED Driver with short circuit protection | Highly Translucent diffuser for glare free symmetric light distribution | Surface Mounted

Matrix Slek - Surface - 1'X1'

Cat No	Power	Size	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-350	25W	(1'x1')	H=38, OD=295X295	2700	AL-48	12

Matrix Slek - Surface - 2'X2'

Cat No	Power	Size	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-360	40W	(2'x2')	H=38, OD=596X596	5000	AL-125	4
L-361	60W	(2'x2')	H=38, OD=596X596	7200	AL-130	4
L-363	80W	(2'x2')	H=38, OD=596X596	9000	AL-125X2	4

50W

100W

150W

200W

300W



LED 2835



Adjustable



Wide
Beam



IP66
Dust / Water
Proof
protected



CRI
>80



PF
>0.90




6KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW WW



Fluctuation Proof



2YEAR
WARRANTY


FEATURES:

Epoxy powder coated die-cast aluminium housing | Alloy with toughened Glass | Withstands upto 450V AC | Isolated Potted IP67 electronic LED driver with APFC, lower THD, Open Circuit Protection, Over Voltage Protection, Surge Voltage Protection upto 6kV With Built In SPD & other safety test | High Voltage protection upto 440V

Neptune - Flood Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Driver	Packing Case
L-554	50W	CW/WW	H=60, L=240, B=200	5500	AL-70	4
L-505	100W	CW/WW	H=70, L=280, B=250	11000	AL-70X2	4
L-512	150W	CW/WW	H=85, L=350, B=315	14000	AL-70X3	4
L-514	200W	CW/WW	H=85, L=350, B=315	20000	AL-70X4	4
L-519	300W	CW/WW	H=90, L=420, B=380	30000	AL-70X6	2

Line Drawing :



50W

100W

200W

FLOOD
LIGHT
OPTICO



LED 2835 Adjustable



Wide Beam



IP66 Dust / Water Proof protected



CRI > 80



PF > 0.90




10KV Surge Protection



(160-350V) AC 50Hz



Colours Available CW WW



Fluctuation Proof




2YEAR WARRANTY

FEATURES:

Non-Corrosive powder coated die-cast aluminium housing | PC Lens with Asymmetric/symmetric light distribution | Withstands upto 440V AC | Isolated Potted IP67 electronic LED driver with APFC, lower THD, Open Circuit Protection, Over Voltage Protection, Surge Voltage Protection upto 6kV With Built In SPD & other safety test | High Voltage protection upto 440V

Optico - Flood Light


Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Driver	Packing Case
L-521	50W	CW/WW	H=35, L=195, B=188	5000	AL-70	12
L-523	100W	CW/WW	H=35, L=236, B=225	10000	AL-70X2	8
L-525	200W	CW/WW	H=50, L=362, B=351	20000	AL-70X4	6

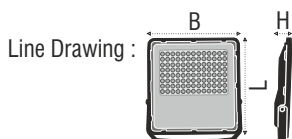

200W

400W

FLOOD
LIGHT
STADIA

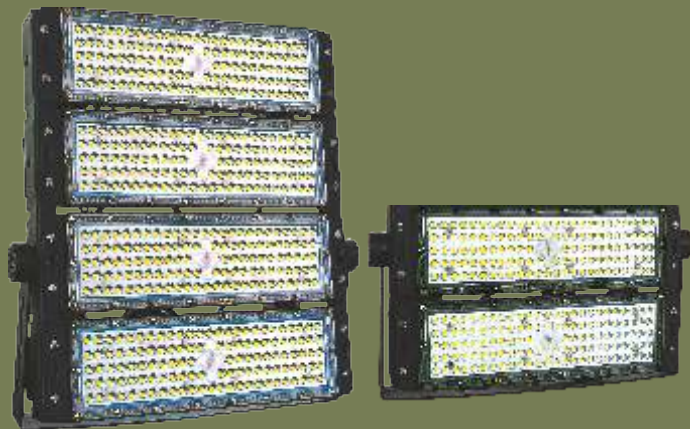

440V
PASS

IP66
Dust / Water
Proof
protected


CRI
>80

PF
>0.90

6KV
Surge
Protection

(140-350V)
AC 50Hz

Colours Available
CW WW



LED 2835 Adjustable Wide Beam


FEATURES:

Non-Corrosive powder coated die-cast aluminium housing | PC Lens with Asymmetric/symmetric light distribution | Lower THD, Over Voltage Protection, Surge Voltage Protection upto 6kV | High Voltage Protection upto 440V | High Voltage Cut Off at 320V

Stadia - Stadium LED Flood Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Driver	Packing Case
L-541	200W	CW/WW	H=100, L=210, B=355	20000	AL-104X2	2
L-543	400W	CW/WW	H=100, L=410, B=355	40000	AL-104X4	2

Line Drawing :




(Also available with 30° & 60°)

50W

100W

150W

200W

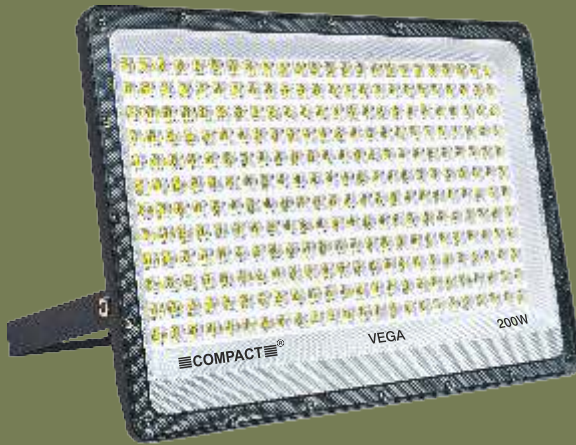

LED 2835 Adjustable



Wide Beam



120°



IP 66
Dust / Water
Proof
protected



CRI
> 80



PF
> 0.90



6kV
Surge
Protection



In-Built
Driver



(180-350V)
AC 50Hz



Colours Available
CW WW



Fluctuation Proof



2 YEAR
WARRANTY


FEATURES:

Non-Corrosive powder coated die-cast aluminium housing | PC Lens with Asymmetric/symmetric light distribution | Withstands upto 440V AC | Built-in electronic LED driver with APFC, lower THD, Open Circuit Protection, Over Voltage Protection, Surge Voltage Protection upto 6kV With Built In SPD & other safety test | High Voltage protection upto 440V | Double phase voltage pass

Vega - Flood Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Packing Case
L-531	50W	CW/WW	H=26, L=208, B=148	6000	10
L-534	100W	CW/WW	H=26, L=258, B=198	10000	8
L-535	150W	CW/WW	H=28, L=310, B=229	15000	4
L-536	200W	CW/WW	H=28, L=310, B=254	20000	4

Line Drawing :



12W

30W

50W

100W

150W

200W

FLOOD
LIGHT
JET



Jet - IR (Motion Sensor)



LED 2835 Adjustable



Wide Beam



IP 66
Dust / Water
Proof
protected



CRI
>80




PF
>0.90



8KV
Surge
Protection



In-Built
Driver



(180-350V)
AC 50Hz



Colours Available
CW WW



Fluctuation Proof



2 YEAR
WARRANTY

FEATURES:

Non-Corrosive powder coated die-cast aluminium housing | Alloy with toughened Glass | Withstand upto 450V AC | Built-in electronic LED driver with APFC, lower THD, Open Circuit Protection, Over Voltage Protection, Surge Voltage Protection upto 8kV With Built In SPD & other safety test | High Voltage protection upto 440V

Jet - Flood Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Packing Case
L-430	12W	CW/WW	H=22, L=100, B=80	1200	10
L-431	30W	CW/WW	H=28, L=135, B=200	3000	10
L-432	50W	CW/WW	H=31, L=159, B=204	5000	10
L-432	50W	B/R/G	H=31, L=159, B=204	-	10
L-433	100W	CW/WW	H=35, L=211, B=272	10000	8
L-433	100W	B/R/G	H=35, L=211, B=272	-	8
L-448	150W	CW/WW	H=35, L=318, B=231	15000	4
L-457	200W	CW/WW	H=35, L=380, B=280	20000	4

FEATURES:

Automatic motion detection | High intensity illumination upon detecting movement | Enhance security & convenience | Adjustable sensitivity / timing / Light Level | Energy efficient LED technology | Adjustable motion sensor

Jet - IR (Motion Sensor) Flood Light

L-431S	30W	CW/WW	H=28, L=135, B=200	3000	10
--------	-----	-------	--------------------	------	----

Note : Available with IR Motion Sensor


70W

100W

150W

200W

250W



250W



With Reflector- UFO



LED 2835



Non
Adjustable



Wide
Beam



IP 66
Dust / Water
Proof
protected



CRI
>80



PF
>0.90




6KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW WW



Fluctuation Proof



2YEAR
WARRANTY

FEATURES:

Aluminum alloy pressure die casted housing & control gear box for better heat dissipation | High Quality lens for optimum light distribution | Built In electronic driver with APFC, lower THD, Open Circuit Protection, Surge Voltage Protection upto 6 kV with Built In SPD



UFO - Highbay Light

Cat No	Power	Colour	Dimensions (mm) H=Height, Dia	Lumen (lm)	Driver	Packing Case
L-912	70W NEW	CW/WW	H=138, Dia=253	8500	AL-77X2	4
L-914	100W	CW/WW	H=138, Dia=253	12500	AL-29X2	4
L-916	150W	CW/WW	H=150, Dia=290	18000	AL-29X3	4
L-917	200W	CW/WW	H=150, Dia=290	22000	AL-29X4	4
L-919	250W NEW	CW/WW	H=155, Dia=316	25000	AL-29X5	2

UFO - Highbay Light with Reflector

Cat No	Power	Colour	Dimensions (mm) H=Height, Dia	Lumen (lm)	Driver	Packing Case
L-918	100W	CW/WW	H=230, Dia=253, Reflector H=90mm	12500	AL-70X2	4

Line Drawing:



100W

150W

200W



LED 2835



Non Adjustable



Wide Beam



IP 66
Dust / Water
Proof
protected



CRI
> 80




PF
> 0.90



6KV
Surge
Protection




In-Built
Driver



(180-350V)
AC 50Hz



Colours Available
CW WW



Fluctuation Proof




2 YEAR
WARRANTY

FEATURES:

Aluminum alloy pressure die casted housing for better heat dissipation | High Quality lens for optimum light distribution | Low THD | Surge Voltage Protection upto 6kV with Built in SPD | High voltage protection upto 440V

UFO - ORB- Highbay Light

Cat No	Power	Colour	Dimensions (mm) H=Height, Dia	Lumen (lm)	Packing Case
L-930	100W	CW/WW	H=32, Dia=260	10000	4
L-931	150W	CW/WW	H=32, Dia=300	15000	4
L-932	200W	CW/WW	H=32, Dia=335	20000	4

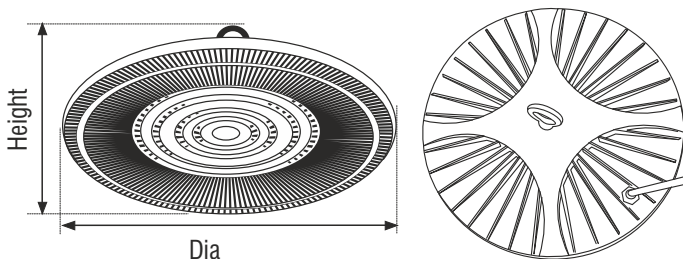

50W

100W



LED 2835



Non
Adjustable



Wide
Beam



IP 66
Dust / Water
Proof
protected



CRI
> 80



PF
> 0.90




8KV
Surge
Protection



(180-350V)
AC 50Hz



Colours Available
CW WW



Fluctuation Proof



2 YEAR
WARRANTY


FEATURES:

Pressure die-cast aluminium alloy housing | Powder coated grey finish with anti corrosion treatment | High efficiency polycarbonate UV stablized cover with integrated Lens to ensure Asymmetrical batwing light distribution | With stands upto 450V AC | Surge Voltage Protection upto 8kV With Built In SPD & other safety test | Pole Mounting with Arm dia of 60mm(max)

Platina - Street Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Packing Case
L-371	50W	CW/WW	H=22, L=370, B=104	5000	8
L-372	100W	CW/WW	H=27, L=428, B=125	10000	8

25W 30W 36W 45W 60W 72W 90W
100W 120W 150W 180W 200W 250W



FEATURES:

Pressure die-cast aluminium alloy housing | Polyester powder coated grey finish with anti corrosion treatment | Withstands upto 450V AC | Isolated Potted IP67 electronic LED driver with APFC, lower THD, Open Circuit Protection, Over Voltage Protection, Surge Voltage Protection upto 6kV With Built In SPD & other safety test | High Voltage cut-off at 320V | Pole Mounting with Arm dia of 45mm(max)

Ecoline Beta - Street Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Driver	Packing Case
L-254B	25W	CW/WW	H=60, L=340, B=105	2500	AL-99	4
L-257B	30W	CW/WW	H=60, L=340, B=105	3000	AL-87	4
L-258B	36W	CW/WW	H=57, L=387, B=146	4800	AL-80	4
L-260B	45W	CW/WW	H=57, L=387, B=146	5400	AL-80	4
L-461B	60W	CW/WW	H=57, L=387, B=146	6000	AL-84	4
L-420B	72W	CW/WW	H=62, L=452, B=212	7500	AL-86X2	4
L-417B	90W	CW/WW	H=62, L=452, B=212	9500	AL-80X2	4
L-428B	100W	CW/WW	H=82, L=452, B=212	11000	AL-84X2	4
L-418B	120W	CW/WW	H=82, L=452, B=212	12000	AL-84X2	4
L-419B	150W	CW/WW	H=67, L=518, B=343	15000	AL-80X3	1
L-422B	180W	CW/WW	H=67, L=518, B=343	18000	AL-84X3	1
L-426B	200W	CW/WW	H=67, L=518, B=343	20000	AL-80X4	1
L-427B	250W	CW/WW	H=67, L=518, B=343	25000	AL-80X5	1

Note : Available with Automatic Day / Night Sensor

25W 36W 45W 60W 72W 90W
100W 120W 150W 180W 200W



LED 2835



Non
Adjustable



Wide
Beam



IP 66
Dust / Water
Proof
protected



CRI
> 80



PF
> 0.90




6KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW WW



Fluctuation Proof



2 YEAR
WARRANTY


FEATURES:

Pressure die-cast aluminium alloy housing | Polyester powder coated grey finish with anti corrosion treatment | High efficiency polycarbonate UV stablized cover with integrated Lens to ensure Asymmetrical batwing light distribution
Withstands upto 450V AC | Isolated Potted IP67 electronic LED driver with APFC, lower THD, Open Circuit Protection, Over Voltage Protection, Surge Voltage Protection upto 6kV With Built In SPD & other safety test | High Voltage cut-off at 320V | Pole Mounting with Arm dia of 45mm(max)

Stellar with Lens - Street Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Driver	Packing Case
L-353	25W	CW/WW	H=60, L=340, B=105	2500	AL-99	4
L-354	36W	CW/WW	H=57, L=387, B=146	4000	AL-80	4
L-355	45W	CW/WW	H=57, L=387, B=146	5400	AL-80	4
L-357	60W	CW/WW	H=57, L=387, B=146	6000	AL-84	4
L-359	72W	CW/WW	H=62, L=452, B=212	7500	AL-86X2	4
L-362	90W	CW/WW	H=62, L=452, B=212	9500	AL-80X2	4
L-364	100W	CW/WW	H=62, L=452, B=212	11000	AL-84X2	4
L-365	120W	CW/WW	H=82, L=452, B=212	12000	AL-84X2	4
L-366	150W	CW/WW	H=82, L=452, B=212	15000	AL-80X3	1
L-368	180W	CW/WW	H=67, L=518, B=343	18000	AL-84X3	1
L-370	200W	CW/WW	H=67, L=518, B=343	20000	AL-84X4	1

25W 30W 36W 45W 60W 72W 90W
100W 120W 150W 200W


FEATURES:

Pressure die-cast aluminium alloy housing | Polyester powder coated grey finish with anti corrosion treatment | High efficiency polycarbonate UV stablized cover with integrated Lens to ensure Asymmetrical batwing light distribution | Withstands upto 450V AC | Isolated Potted IP67 electronic LED driver with APFC, lower THD, Open Circuit Protection, Over Voltage Protection, Surge Voltage Protection upto 6kV With Built In SPD & other safety test | High Voltage cut-off at 320V Pole Mounting with Arm dia of 45mm(max)

Neo Lanser - Street Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Packing Case
L-436	25W	CW/WW	H=52, L=310, B=128	2500	8
L-437	30W	CW/WW	H=52, L=310, B=128	3000	8
L-450	36W	CW/WW	H=52, L=310, B=128	4000	8
L-434	45W	CW/WW	H=52, L=310, B=128	5000	8
L-444	60W	CW/WW	H=50, L=387, B=165	6000	8
L-449	72W	CW/WW	H=50, L=387, B=165	7200	8
L-458	90W	CW/WW	H=50, L=387, B=165	9000	8
L-438	100W	CW/WW	H=50, L=387, B=165	10000	8
L-442	120W	CW/WW	H=72, L=575, B=205	12000	4
L-447	150W	CW/WW	H=72, L=575, B=205	15000	4
L-439	200W	CW/WW	H=72, L=575, B=205	20000	4

Note : Available with Automatic Day / Night Sensor


TURBO
SWIFT
Backup upto
4 HOURS

Powerful Air Suction for Odourless and Clean Air

Automatic Shutter for Dust Protection

Unique Blade Design for Higher Air Flow, Noise Free

Light Weight & Dust Proof Body

Anti-static Properties

Copper Winded Motor

FEATURES:
Automatic Shutter for Dust Protection | High Quality Engineering Plastic | Light Weight and Dust Proof Body | Easy to Install and Clean | Ideal for Mounting on Glass & Wood | Power Saving | Stylish Design
Turbo - Exhaust Fan

Cat No	Size (mm)	Colour	Air Delivery	RPM	Dimensions (mm) H=Height, B=Breadth	Packing Case
F-141	150mm	White	275 CMH	1350 RPM	L=238, B=238, H=125, CO=178*178	8
F-142	200mm	White	450 CMH	1300 RPM	L=295, B=295, H=135, CO=245*245	8
F-143	250mm	White	900 CMH	1250 RPM	L=345, B=345, H=135, CO=293*293	4


FEATURES:
Telescopic Pole | Three Speeds & Power Indicators | Long-lasting Battery Life | Low-noise Operation | Three-level Height Adjustable | Innovative Base Design | Multi-angle Adjustment for wall-mounted Installation
Swift - Rechargeable DC Fan - 165mm

Cat No	Power	Colour	Battery	Charging Port	Dimensions (mm) H=Height, B=Breadth	Packing Case
F-121	5W	White	1500mAh	Type-C	L=167, B=135, H=255	6



BREEZE



JIFFY

For Fountains and Desert Coolers



Works on Inverter



Motorised Louvers



Silent Operation



Dual Mode Operations



Ice Chamber



FEATURES:

Air Delivery : 400m³/h | 90° up to down and left to right air supply | Three Speed : Low/Medium/High | Maximum Evaporation Capacity:500ml/h | Vertical Louvres Movement : Motorised & Horizontal Louvres Movement : Manual

Breeze - Air Cooler

Cat No	Power	Water Tank	Maximum wind Speed	Usable Area	Dimensions (mm) H=Height, B=Breadth	Packing Case
A-241	65W	7Ft.	7 m/s	20 m ³	H=550, B=220	1



Completely noiseless



Multiple uses



Low electricity consumption



Continuous duty, long life



Easy Installation

**ONE SEASON
WARRANTY**

FEATURES:

Fully submersible | Completely noiseless | No rusting, no jamming | Small size | Multiple uses | Easy maintenance & cleaning | Low electricity consumption | Continuous duty, long life | Easy installation | Operates well at low voltage

Jiffy - Submersible Pump

Cat No	Power	H. Max	Output	Lead Wire Length	Packing Case
A-231	18W	5Ft.	980L/H	1.5Mtr.	50


MAGMA/MAGMA Pro

 Efficient Heat Transfer
Copper Tube Element

 Nickel Plating For
Longer Element Life


Water Proof


BLAZE

HOTSTAR
**Magma/
Magma Pro**

 Water proof connector ensuring complete protection against electric shock |
 Efficient heat transfer heating element | Nickel plating for longer element life |
 Water proof | Plastic hook for safe operation | ISI mark 3 Pin molded plug

Cat No	Power	Model Name	Plug	Packing Case
H-110	1500W	Magma	16Amp	20
H-110P	1500W	Magma Pro	6Amp	20

**Blaze
Fan Heater**

 2 Heat settings | Temperature Control | Adjustable thermostat | Power indicator
 light | Safety fuse inside | Overheat Protection | Convenient handle

 Rapid
Heating

 Powerful fan for
instant heating

 Overheat
Protection

 Fan Speed
Control

 Adjustable
Thermostat

 Cooling and
Heating

 High Quality
Power Cord


Cat No	Power	Body Colour	Packing Case
H-121	1000/2000W	White	6

**Hotstar
Quartz Room Heater**

 2 Quartz Tube Heating Element | Front Grill for Safety | Power ON Indicator |
 Safety Tip Over Switch | Convenient handle

 Two Quartz Tube
Heating Element

 Power ON
Indicator

 Power
400W/800W

 Low Power
Consumption

 2 Heating
Positions

 Safety Tip
Over Switch

 Easy To Carry
Handle

 Front Grill
For Safety


Cat No	Power	Body Colour	Packing Case
H-131	400/800W	Grey	4



Indicator Light



Push OFF-ON Button to Start



Double Side Safety Grill



USB Charging



Rechargeable for upto 500 times



Self-Support Stand



8 MONTHS WARRANTY

FEATURES:

UV Light | Charging - Type C | Fast Recharge | Double Side Safety Grill | Hanging Option & Self Support Stand | Charge the Racket in switch - OFF mode for 7-8 hours for first use | 3 Mode operation (Auto mode-UV Light, Manual mode, Off mode) | 1200mAH Li-ion rechargeable battery | Eco friendly product suitable for indoor & outdoor use | Push the OFF-ON-button to start | Electric Shockproof net can kill blood sucking mosquitos but it is safe for the human beings

Savior UV - LED Rechargeable Mosquito Racket

Cat No	Battery	Colour	Packing Case
M-852	1200mAH	Orange, Green, Blue	20

FEATURES:

Charge the Racket in switch - OFF mode for 4-5 hours for first use | Fast Recharge (30 Minutes) | Rechargeable battery of 400mAH | Push the OFF-ON-button to start | Swat the flying mosquito while pressing the power button (Indicator light with appear)

Savior - Rechargeable Mosquito Racket

Cat No	Colour	Packing Case
M-851	Orange, Green, Blue	20

CORD 3 Meter

ELITE

PIXIE
CORD 4 Meter

4 Universal Sockets

Fuse Protection

ON/OFF Switch

High Power Mov For Protection

Overload & Short Circuit Protection
FEATURES:

Built in Surge Protector/Spike Protector | Compatible with Multi-country Plug I
Multi-Purpose Plug Sockets | Brass Contact for Long Life | Heavy Duty Cable |
ON/OFF Switch | Fuse Protection | Shock Proof Body | Overload & Short
Circuit Protection | High Power MOV for Protection

Elite - 4 Way Computer Guard Mtr.

Cat No	Power	Colour	Cord Length	Number of Socket	Packing Case
A-201	1500W	White	3 Meter	4 Universal Socket	10
A-202	1500W	White	5 Meter	4 Universal Socket	10


3 Universal Sockets

Fuse Protection

ON/OFF Switch

High Power Mov For Protection

Overload & Short Circuit Protection
FEATURES:

Universal socket | Heavy duty spring action contacts | ON/OFF Switch with LED
Indicator | Short Circuit Protection | High Power MOV for surge protection |
ABS Body - Flameproof & Sturdy | Shock Proof Body

Pixie - 3 Socket Extension Board 4Mtr. (2 Pin plug)

Cat No	Power	Colour	Cord Length	Number of Socket	Packing Case
A-205	1500W	White	4 Meter	3 Universal Socket	10



6 m x 1.70cm x 0.125mm

15 m x 1.70cm x 0.125mm



Strong Grip



Long Lasting
Life



High Electrical
Stability



All Weather
Proof

Gripwell - FR PVC Insulation Tape Fire Retardant

Features:

- FR PVC Insulation Tape Fire Retardant
- Taiwan Latest Technology
- Strong Grip
- Long Lasting Life
- High Electrical Stability
- High Insulation
- All Weather Proof
- Lasting Stretchability



Specification

Cat No. : A-206-6M
 Colour : Black, Blue, Red, Green
 Yellow & White
 Dimension : 6m x 1.70cm x 0.125mm
 Packaging : 30 Units

Cat No. : A-207-15M
 Colour : Black, Blue, Red, Green
 Yellow & White
 Dimension : 15m x 1.70cm x 0.125mm
 Packaging : 20 Units

Smart Hero Classic

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-179C	5W	CW/NW/WW/B/R/G/P	H=45, CO=Ø90, OD=105	450*	100

Adora (Fit inot Junction Box)

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Packing Case
L-161	3W	CW/NW/WW/B/R/G/P/SB	H=26, CO=Ø45, OD=75	220*	120

Omega COB

Cat No	Power	Colour	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Beam Angle	Driver	Packing Case
L-162	4W	CW/NW/WW	H=56, CO=Ø60, OD=68	280	24°	AL-11	20
L-164	6W	CW/NW/WW	H=68, CO=Ø75, OD=86	400	24°	AL-12	20
L-167	10W	CW/NW/WW	H=68, CO=Ø75, OD=86	660	24°	AL-41	12
L-165	15W	CW/NW/WW	H=90, CO=Ø95, OD=110	1150	24°	AL-75	8
L-168	20W	CW/NW/WW	H=114, CO=Ø95, OD=110	1360	38°	AL-81	8

Sky COB

L-307	24W	CW/NW/WW	H=95, CO=Ø130, OD=140	1950	24°	AL-22	8
-------	-----	----------	-----------------------	------	-----	-------	---

Diamond -Track Light White Body

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, OD=Outer Diameter	Beam Angle	Lumen (lm)	Packing Case
L-462	10W	CW/NW/WW	H=130, L=128, OD=50	36°	750	12
L-464	20W	CW/NW/WW	H=150, L=157, OD=70	36°	1800	6
L-466	30W	CW/NW/WW	H=162, L=175, OD=80	36°	2600	6

Diamond -Track Light Black Body

L-463	10W	CW/NW/WW	H=130, L=128, OD=50	36°	750	12
L-465	20W	CW/NW/WW	H=150, L=157, OD=70	36°	1800	6
L-467	30W	CW/NW/WW	H=162, L=175, OD=80	36°	2600	6

Matrix - Armstrong Ceiling

Cat No	Power	Size	Dimensions (mm) H=Height, CO=Cutout, OD=Outer Diameter	Lumen (lm)	Driver	Packing Case
L-387A	40W	(2'x2')	H=67, CO=Ø580, OD=595	5200	AL-124	2
L-287A	60W	(2'x2')	H=67, CO=Ø580, OD=595	7800	AL-92	2
L-288A	80W	(2'x2')	H=67, CO=Ø580, OD=595	8500	AL-93	2

Matrix - POP Ceiling

L-387B	40W	(2'x2')	H=67, CO=Ø580, OD=595	5200	AL-124	2
L-287B	60W	(2'x2')	H=67, CO=Ø580, OD=595	7800	AL-92	2
L-288B	80W	(2'x2')	H=67, CO=Ø580, OD=595	8500	AL-93	2

Lumino - Surface

L-117	25W	(1'x1')	H=38, OD=332X332	2700	AL-17	12
L-119	40W	(2'x2')	H=52, OD=560X560	5200	AL-124	2
L-112	60W	(2'x2')	H=50, OD=560X560	8500	AL-92	2

Capsule - Street Light

Cat No	Power	Colour	Dimensions (mm) H=Height, L=Length, B=Breadth	Lumen (lm)	Driver	Packing Case
L-278	15W	CW/WW	H=45, L=320, B=79	1500	AL-99	8
L-279	20W	CW/WW	H=45, L=320, B=79	2000	AL-81	8
L-280	25W	CW/WW	H=45, L=320, B=79	2500	AL-82	8
L-291	30W	CW/WW	H=45, L=320, B=79	3000	AL-85	8
L-300	36W	CW/WW	H=45, L=320, B=79	4000	AL-89	8
L-293	45W	CW/WW	H=45, L=320, B=79	5400	AL-89	8

Our Energy Saving products are approved & regularly used by the following esteemed Organisations of India.



CLIENT PORTFOLIO



Sobti Sapphire, Rudrapur



Fort Collins, Ludhiana



Khadims, Aligarh



Mega Heights - Bareilly



Park View Society, Prayagraj



SEA VIEW HOTEL, Mangalore



Transport Nagar Aligarh



Hero Showroom, Lakhimpur



Raja Ji Dhaba - Joya

CLIENT PORTFOLIO



Amity School - Noida



GD Goenka Public School-New Delhi



Delhi Public School - Hapur



Indus Valley Public School - Noida



Kohli's Sweets, Patiala



Tilak Maharashtra University-Delhi



MM University - Mullana



United University - Prayagraj



Indian Statistical Institute-Bangalore



Prometheus School - Noida



Life-Line Hospital - Bareilly



Apollo Hospital - Noida



Sant Gyaneshwar Hospital
Bareilly



Rajiv Gandhi Cancer Institute &
Research Center - New Delhi



Payyanur Co-Operative Hospital
Kerala



The Oberoi Rajvilas Hotel
Rajasthan



Radisson Blu Hotel
Rudrapur



Country Inn & Resort
Ghaziabad



Alcazar Wedding Resort
Patiala



The Blue Orchid Hotel & Resort
Ramnagar



Shoppers Stop - Hyderabad



Pacific Mall - New Delhi



Westside Showroom - Bareilly



Tanishq Showroom - Bareilly



Hyundai Showroom - Noida



State Bank of India - NCR



HDFC Bank - NCR



Red Fort Ramleela Maidan - Delhi



Indian Oil Corporation - Delhi



BPCL Petrol Pump
U.P. & Uttarakhand



General Notes:

- Every effort has been made to ensure accuracy in compilation of technical/commercial detail in this catalogue
- Specifications and performance data are constantly changing; current details should therefore be checked with the company
- Input Voltage : 160V-350V AC 50Hz
- CRI>80 of Cool White Colour
- Colour : Cool White- 6000K - 6500K
- Neutral White- 4000K - 4200K
- Warm White- 2800K-3000K
- All lumens are system lumens.
- All wattages are system wattages.
- All dimensions are in mm
- H=Height, CO=Cutout, OD=Outer Diameter, L=Length, B=Breadth
- CW=Cool White, NW=Neutral White, WW=Warm White, R=Red, G=Green, B=Blue, P=Pink, O=Orange, PR=Purple, GY=Golden Yellow, SB=Sky Blue
- LED Premium Panel, Aero Panel, Junction Box, Smart Hero, COB, Matrix are "BIS APPROVED" (IS 10322 (Part 5/Sec-2):2012, R-93006610)
- LED Marina, Linear Light, Tube, Surface Panel, Luna Ceiling Light, Zara, Lumino are "BIS APPROVED" (IS 10322 (Part 5/Sec-1):2012, R-93000949)
- LED Flood Light, Bulk Head "BIS APPROVED" (IS 10322 (Part 5/Sec-5):2013, R-93006335)
- LED Street Light "BIS APPROVED" (IS 10322 (Part 5/Sec-3):2012, R-93005894)
- LED Driver :- Constant Current LED Driver are "BIS APPROVED" (IS 15885 (Part 2/Sec-13):2012, R-85002062)
- LED Bulbs are "BIS APPROVED" (IS 16102 (Part 1):2012, R-85000418)
- Strip Light IP20 "BIS APPROVED" (IS 10322 (Part 5/Sec-7):2017, R-93009792)
- Rope Light (A.C. Strip) "BIS APPROVED" (IS 10322 (Part 5/Sec-7):2017, R-41115681)
- Junction Box : Cat No. 0.5W, JB-3W, JB-3R, JB-3B, JB-3G, JB-3Y are Patented. Patent No: 284408

HSN No.	Description	
• 9405	LED Luminaires	
• 9405	LED Drivers	
• 8539	LED Bulbs / Lamps	
• 84137096	Submersible Pump	
• 85167920	Rechargeable Mosquito Racket	IP20 Protected from touch by objects greater than 12 millimeters - Not protected from liquids
• 85372000	Extension Board	IP65 (Protected from total dust ingress) - Protected from high pressure water jets from any direction
• 85469090	FR PVC Insulation Tape	IP66 (Protected from total dust ingress) - Protected from high pressure water jets from any direction
• 85162900	FAN HEATER	IP67 (Protected from total dust ingress) - Protected from immersion between 15 centimeters and 1 meter in depth
• 85161000	Immersion Water Heater	
• 84149090	RECHARGEABLE DC FAN	Our Energy Saving products are approved & regularly used by the following esteemed Organisations of India.

CAPTAIN GEARS & FANS

B-84 Sector 80, Phase-II Noida - 201305 (U.P.)

Call us : 9810145540, 8527708877

AN ISO 9001:2015 CERTIFIED COMPANY

Authorized Dealer

Download Catalogue by
Scanning This QR Code



Email : compact@compactlighting.net | Web : www.compactledandappliances.com

COMPACT[®]

Since 1994

Gold

Exclusive Range of Architectural Lights



LED Gold Catalogue

Futuristic Manufacturing Facility

A proud champion of the Government's Make in India initiative, COMPACT'S future forward plant produces a wide range of world class lighting products and home appliances under one roof.

- Our smart facilities incorporate the best practices of automated manufacturing systems, spread across a vast 40,000 sq. ft. of covered area.
- More than 12 dedicated lines for high Volume production.
- Full backward integration like our own Extrusion machines, we are dedicated towards local manufacturing with "Made in India" Products not just assembled in India.
- Advanced in-house LED laboratory features cutting-edge equipment like Spectro Radiometer, Surge Generator, and Humidity Chamber, ensuring rigorous testing for superior performance, reliability, and durability of our products.
- LED module manufacturing unit equipped with high-speed SMT machines, capable of mounting 1.5 million LEDs/components daily, ensuring precision, efficiency, and high-quality production at an exceptional scale.



“ तमसो मा ज्योतिर्गमय ” - Leading from darkness to light

Meet COMPACT – where innovation meets trust. For over 30 years, We have been redefining manufacturing excellence providing reliable, highest quality products to Indian consumers. From pioneering energy efficiency technologies in 1995 to being the first movers in introducing LED bulbs in 2003, we have consistently stayed ahead of the curve, shaping the future of FMEG solutions.

Our rigorous quality control ensure that every product we craft delivers unparalleled performance. But beyond the machines and processes, it's our people who drive us forward—70% of our workforce consists of skilled women professionals, a testament to our commitment to empowerment and progress.

Our dedication to quality isn't just a promise—it's a standard we uphold every day. Our products adhere to the best-in-class safety and performance standards. COMPACT is a hallmark of trust and we truly cherish the faith that our customers have reposed in us. With numerous patents to our name, innovation is ingrained in our DNA.

COMPACT product portfolio is built for versatility—whether it's Bulbs and battens or architectural lights for elegant interiors, powerful streetlights for cityscapes, or high-performance floodlights for expansive spaces, we cater to every need. Our range of electrical accessories and appliances, from Insulation Tape, extension boards, mosquito rackets to Heating and cooling appliances adds even more value to everyday life.

Our channel partners form the strong foundation that has shaped COMPACT into the thriving force it is today. With presence in over 10,000 retail points nationwide, we hold our extended family of retailers very close to our heart. These relationships are our growth engines and we stay committed to them as we do to our core values of Integrity and Trust. For You, With You, Always.



BIS Certificate

[illegible][illegible][illegible][illegible]

Table of Contents

1-5 Magnetic Series



6-9 Surface Downlight



10-11 Pendent Linear Light



12-12 Hanging Pendant

13-17 Recessed Downlight



18-22 Panel




23-23 Beb Lamp



24-26 Profile & Cabinet LED Light



27-28 Flexi Profile & Flexi LED Light



29-29 Stage Lights



30-41 Outdoor Lights





MAGNETIC SERIES


- Easy plug & play installation & arrangement
- Numerous light combinations and design possibilities
- Multiple fixtures powered by single driver



Insta - Spot LED Light For Magnetic Track

Features :

- Pushfit into Magnetic Track
- Change Position Easily
- 360° Adjustable
- COB Focus Spotlight
- Narrow Beam Optical Lens
- Aluminium Housing for efficient heat dissipation.
- Multiple Fixtures Powered by Single Driver



Cat No	Power	Body Colour	Dimensions (mm) L= Length, H=Height, OD=Outer Diameter	Lumen	Beam Angle	Driver	Packing Case
G-402	10W	Black	L=96, H=113, OD=44	750	24°	AG-100	As per order



Insta - Linear LED Light For Magnetic Track

Features :

- Pushfit into Magnetic Track
- Change Position Easily
- Diffused Flood Light Effect
- Aluminium Housing for efficient heat dissipation.
- Glare Free Diffuser
- Multiple Fixtures Powered by Single Driver



LED



Non
Adjustable



Wide
Beam



IP20
Dust / Insect
protected



CRI
>80




PF
>0.90



4KV
Surge
Protection



Colours Available
CW NW WW



(160-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm) L=Length, H=Height, B=Breadth	Lumen	Beam Angle	Driver	Packing Case
G-441	10W	Black	L=330, H=24, B=34	1100	180°	AG-100	As per order
G-444	20W	Black	L=660, H=24, B=34	2200	180°	AG-100	As per order



(Adjustable)



Insta - Blade LED Light For Magnetic Track

Features :

- Pushfit into Magnetic Track
- Change Position Easily
- Multiple Fixtures Powered by Single Driver
- Aluminium Housing for efficient heat dissipation
- Row of Narrow Beam Spotlight



COB



Narrow
Beam



IP20
Dust / Insect
protected



CRI
>80




PF
>0.90




4KV
Surge
Protection



Colours Available
CW NW WW



(160-350V)
AC 50Hz



Fluctuation Proof



2YEAR
WARRANTY

Insta - Blade LED Light For Magnetic Track Adjustable

Cat No	Power	Body Colour	Dimensions (mm) L = Length, B = Breadth, H = Height	Lumen	Beam Angle	Driver	Packing Case
G-447	6W	Black	L = 128, B = 32, H = 55	420	24°	AG-100	As per order

Insta - Blade LED Light For Magnetic Track

Cat No	Power	Body Colour	Dimensions (mm) L = Length, B = Breadth, H = Height	Lumen	Beam Angle	Driver	Packing Case
G-450	10W	Black	L = 330, B = 34, H = 21	1100	24°	AG-100	As per order



100W Power Module



Multiuse Corner



Vertical Corner



Linear Connector



In-Built Input Box



External Input Conductive Box



Track Channel

Features :

- Surface Mounted
- Designed to Complement Insta Magnetic Series of Lights

Track Channel Accessories

Features :

- Secure locking mechanism
- Magnetic Force Connection
- A variety of joiners available to make longer lengths

Magnetic Track / Power Module

Cat No	Length	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Packing Case
G-461	1 Meter	Black	L=1000, B=35, H=10	As per order
G-462	2 Meter	Black	L=2000, B=35, H=10	As per order
AG-100	100W Power Module	Black	L=220, B=50, H=22	As per order

Magnetic Track Channel Accessories

Cat No	Description	Body Colour	Packing Case
G-465	Multiuse Corner - Conductive Connector	Black	As per order
G-466	Vertical Corner - Conductive Connector	Black	As per order
G-467	Linear Connector - Conductive to move for joining track neck	Black	As per order
G-468	In-Built Input Box - For Hiding wire of SMPS	Black	As per order
G-469	External Input Conductive Box - For Hiding wire	Black	As per order

SURFACE DOWNLIGHTS





White



Rose Gold



Nickle Black

Nova - Surface LED COB

Features :

- Focused Light Output
- Aluminium Housing for efficient heat dissipation.
- Surface Mounting
- Compact Design with in-built driver
- Reflector Rose White (W), Rose Gold (RG) & Nickel Black (NB)



Nickel Black



COB



Non
Adjustable



Beam
Angle



IP20
Dust / Insect
protected



CRI
> 80




PF
> 0.90



4KV
Surge
Protection



Colours Available
CW NW WW



(160-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY

Nova - Cylindrical LED COB

Cat No	Power	Reflector	Body Colour	Dimensions (mm) OD= Outer Diameter, L=Length	Lumen	Beam Angle	Driver	Packing Case
L-333	10W	W / RG / NB	W / B	OD=53, L=80	750	36°	In-Built	20
L-336	15W	W / RG / NB	W / B	OD=73, L=100	1400	36°	In-Built	20
L-339	20W	W / RG / NB	W / B	OD=73, L=132	1600	36°	In-Built	20

Nova - Square LED COB

Cat No	Power	Reflector	Body Colour	Dimensions (mm) OD= Outer Diameter, L=Length	Lumen	Beam Angle	Driver	Packing Case
G-334	10W	W / RG / NB	Black	OD=53, L=80	800	36°	In-Built	20

COMPACT[®] HANGING PENDANT COB - NOVA

Gold

10W 15W 20W

LED

PENDANT

NOVA

Length of Wire 700 mm



10W



15W



20W



Rose Gold



Nickel Black



White

Nova - Hanging Pendant Surface LED COB

Features :

- Aluminium Housing for efficient heat dissipation
- Surface Mounting
- Focused Light Output
- Compact Design with in-built driver
- Reflector Rose White (W), Rose Gold (RG) & Nickel Black (NB)



COB



Non
Adjustable



Beam
Angle



IP20
Dust / Insect
protected



CRI
> 80




PF
> 0.90



4KV
Surge
Protection



Colours Available
CW NW WW



(160-350V)
AC 50Hz




Fluctuation Proof



2YEAR
WARRANTY

Nova - Hanging Pendant Surface COB

Cat No	Power	Reflector	Body Colour	Dimensions (mm) OD= Outer Diameter, L=Length	Lumen	Beam Angle	Driver	Packing Case
G-333	10W	W / RG / NB	W / B	OD=53, L=80	750	36°	In-Built	8
G-335	15W	W / RG / NB	W / B	OD=73, L=100	1400	36°	In-Built	8
G-337	20W	W / RG / NB	W / B	OD=73, L=132	1600	36°	In-Built	8

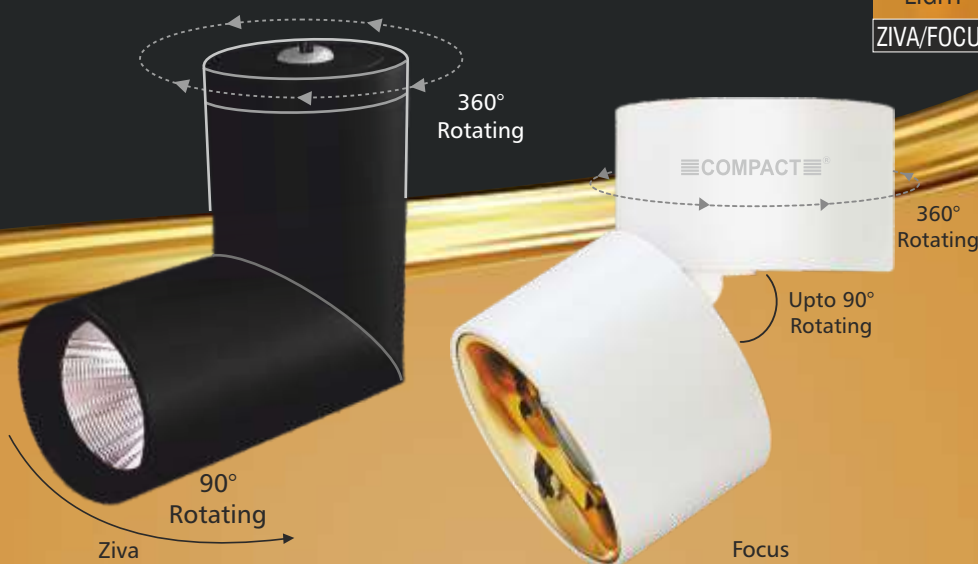

Surface COB (Adjustable Cylindrical Downlight)

Features :

- A unique design with 360° and 90° rotating focus
- Surface Mounting
- Aluminium Housing for efficient heat dissipation
- Light up the space with Wall Washer's power.
- Compact Design with in-built driver



COB



Adjustable



36°
Beam
Angle



IP20
Dust / Insect
protected



CRI
> 80



PF
> 0.90



4KV
Surge
Protection



Colours Available
CW NW WW



(160-350V)
AC 50Hz



Fluctuation Proof




2YEAR
WARRANTY

Ziva - Surface COB - Adjustable Cylindrical Downlight

Cat No	Power	Body Colour	Dimensions (mm) OD= Outer Diameter, L=Length	Lumen	Beam Angle	Driver	Packing Case
G-338	12W	Black	OD=55, L=160	1200	36°	In-Built	20

Focus - Surface COB - Split Cylindrical LED Downlight

Cat No	Power	Reflector	Body Colour	Dimensions (mm) OD= Outer Diameter, H=Height	Lumen	Beam Angle	Driver	Packing Case
G-343	10W	W / RG / NB	W / B	OD=73, H=90	1000	36°	In-Built	20
G-345	15W	W / RG / NB	W / B	OD=87, H=98	1500	36°	In-Built	20

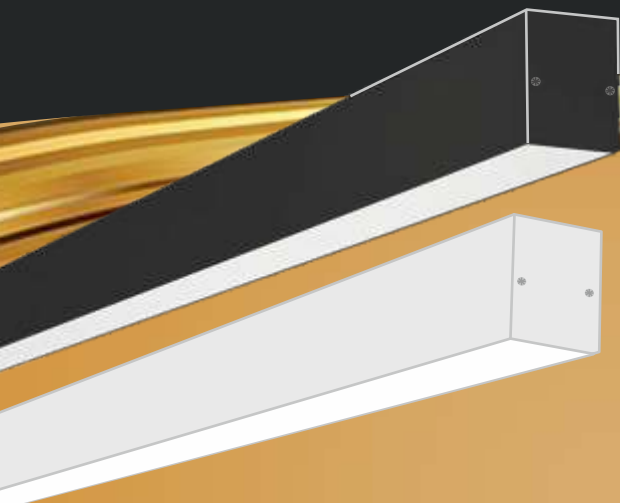

Linea - Pendant LED Linear Light (Hanging with Wire)

Features :

- Adaptable: Surface Mount as well as Hanging pendant
- Aluminium Extrusion Housing to effectively dissipate heat
- Polycarbonate diffuser: glare free light, reduces strain
- Provides uniform illumination



Non
Adjustable



Wide
Beam



IP 20
Dust / Insect
protected



CRI
> 80




PF
> 0.90



4KV
Surge
Protection



Colours Available
CW NW WW



(160-350V)
AC 50Hz




Fluctuation Proof



2YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Beam Angle	Driver	Packing Case
G-471	42W	Black/White	L=1200, B=50, H=70	3800	120°	In-Built	10

Note : Set of Two Suspension Wires MRP Rs. 200/- Extra

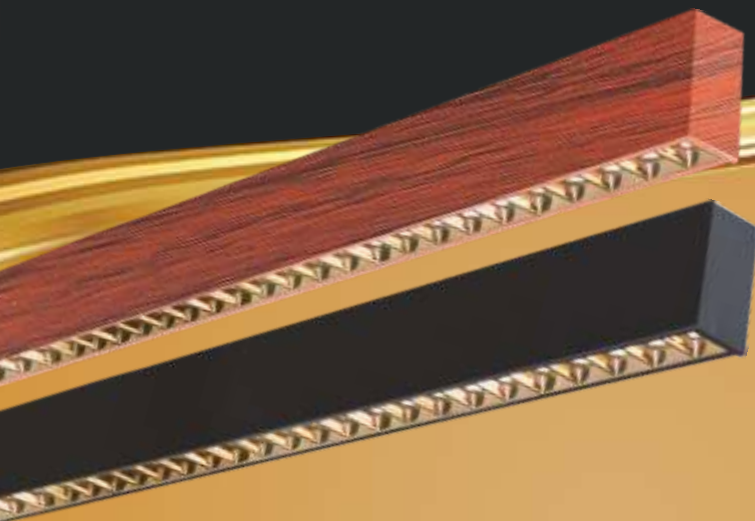

Features :

- Adaptable: Surface Mount as well as Hanging pendant
- Aluminium Extrusion Housing to effectively dissipate heat
- Polycarbonate diffuser: glare free light, reduces strain
- Provides uniform illumination
- Row of Narrow beam spot lights
- Its focused beam and versatile design make it an excellent choice for creating visual interest and ambiance in any setting.
- Designed to accentuate specific areas or objects with precision



Linea - Beam Blade Pendant LED Linear Light

Cat No	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Beam Angle	Driver	Packing Case
G-472	42W	Black/Wooden	L=1200, B=35, H=70	3800	48°	In-Built	10



Crescent



Donna



Wilson

Hanging Pendant for Bulb

Features :

- Pendant light are elegant and will bring a sense of modernity to the style of your Interior.
- Minimalistic Design
- For Indoor Use
- Material Powder Coated CRCA Sheet

Hanging Pendant for Bulb E-27 Holder

Cat No	Name	Body Colour	Dimensions (mm) L= Length, OD=Outer Diameter	Holder Type	Packing Case
G-340	Crescent	White/Black/Orange	L=180, OD=298	E-27	4
G-341	Wilson	White / Black	L=180, OD=200	E-27	4
G-342 	Donna	Black	L=210, OD=170	E-27	4

RECESSED DOWNLIGHTS



2W

4W

6W

8W

10W

12W




Beam Blade LED Spot Light

Features :

- Precision lighting with its sleek, blade design
- Aluminium Housing to dissipate heat effectively
- Recessed Mounting
- Row of narrow beam spot lights
- Rose Gold, White and Nickel Black Reflector



Narrow Beam



Cat No	Power	Reflector	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Beam Angle	Driver	Packing Case
G-452	2W	Interchangeable	W / B	L=45, B=45, CO=41, H=34	200	36°	-	20
G-456	4W	Interchangeable	W / B	L=68, B=45, CO=65, H=35	400	36°	-	20
G-453	6W	Interchangeable	W / B	L=95, B=45, CO=92, H=35	600	36°	-	20
G-454	8W	Nickel Black	W / B	L=76, B=76, CO=70X70, H=37	800	36°	-	20
G-455	10W	Interchangeable	W / B	L=147, B=45, CO=137, H=33	900	36°	AL-72	20

Spot Blade LED Spot Light **NEW**

Cat No	Power	Reflector	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Beam Angle	Driver	Packing Case
G-457	10W	Nickel Black	Black	L=164, B=41, CO=41, H=44	1000	24°	-	20



Coral


Coral

Boss

Coral - LED COB Downlight

Features :

- Aluminium Housing to effectively dissipate heat
- Captivating finish of reflectors to give the atmosphere a luxurious look
- Uniform light distribution with reduced glare
- Deep COB Downlight
- Reflector Rose Gold (RG), Gun Grey (GG) & White (W)
- Recessed Mounting



Cat No	Power	Reflector	Body Colour	Dimensions (mm) H=Height, CO=Cut Out, OD=Outer Diameter	Lumen	Beam Angle	Driver	Packing Case
G-109	12W	RG / GG / W	W / B	H=80, CO=Ø78, OD=85	1150	36°	AL-44	20
G-110	15W	RG / GG / W	W / B	H=80, CO=Ø78, OD=85	1400	36°	AL-72	12

Boss - LED COB Downlight **NEW**

Cat No	Power	Reflector	Body Colour	Dimensions (mm) H=Height, CO=Cut Out, OD=Outer Diameter	Lumen	Beam Angle	Packing Case
G-221	10W	Black	Gey	H=65, CO=Ø64, OD=70	1000	24°	20

Also available with dimmable driver on request

7W

10W

12W

18W

25W

35W



Regal



Zoom

Regal - LED COB Deep Downlight

Features :

- Aluminium Housing
- Reflector Rose Gold (RG), Gun Grey (GG)
- Innovative optics to minimize glare
- Recessed Mounting



COB



Non Adjustable



Beam



IP20
Dust / Insect
protected



CRI
> 80




PF
> 0.90



4KV
Surge
Protection



Colours Available
(CW) (NW) (WW)



(160-350V)
AC 50Hz



Fluctuation Proof



2YEAR
WARRANTY

Cat No	Power	Reflector	Body Colour	Dimensions (mm) H=Height, CO=Cut Out, OD=Outer Diameter	Lumen	Beam Angle	Driver	Packing Case
G-102	7W	RG/GG	W / B	H=50, CO=Ø68, OD=71	600	36°	AL-12	20
G-104	12W	RG/GG	W / B	H=64, CO=Ø79, OD=85	1200	36°	AL-44	20
G-106	18W	RG/GG	W / B	H=75, CO=Ø89, OD=95	1800	36°	AL-81	12

Zoom - LED COB Downlight

Features :

- Diamond cut reflector to create intense light beam
- Aluminium housing to effectively dissipate heat
- Durable and Compact design for long term performance
- Wall Washer COB Downlight with 180° zoom
- Recessed Mounting



Adjustable



Narrow Beam



2YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm) H=Height, CO=Cut Out, OD=Outer Diameter	Lumen	Beam Angle	Driver	Packing Case
L-192	10W	White	H=77, CO=Ø115, OD=125	900	40°	AL-76	8
L-195	25W	White	H=136, CO=Ø150, OD=166	2250	40°	AL-76	8
L-197	35W	White	H=136, CO=Ø150, OD=166	2650	40°	AL-77	8

Also available with dimmable driver on request

NEW



12W



18W

NEO Element - LED Downlight

Features :

- Aluminium Housing
- Reflector Rose Gold (RG), Gun Grey (GG), Silver
- New Innovative Design Gives Glare Free Light
- Recessed Mounting



Cat No	Power	Reflector	Body Colour	Dimensions (mm) H=Height, CO=Cut Out, OD=Outer Diameter	Lumen	Beam Angle	Packing Case
G-111	12W	RG/GG/Silver	W / B	H=50, CO=Ø75, OD=83	1200	36°	20
G-112	18W	RG/GG/Silver	W / B	H=55, CO=Ø95, OD=107	1800	36°	12



Royal - LED Deep Round Panel

Features :

- Aluminium housing to effectively dissipate heat
- PMMA diffuser for glare free lighting
- Durable and Compact design
- Recessed mounting



LED 2835



Non
Adjustable



Very Wide
Beam



Ceiling
Thickness



IP20
Dust / Insect
protected




CRI
>80



PF
>0.90



4KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW NW WW




Fluctuation Proof



2 YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm)	Lumen	Beam Angle	Driver	Packing Case
			H=Height, CO=Cut Out, OD=Outer Diameter				
G-506	12W	White	H=40, CO=Ø102, OD=120	1200	120°	AL-20	12
G-508	18W	White	H=40, CO=Ø127, OD=145	1800	120°	AL-21	12
G-510	24W	White	H=40, CO=Ø153, OD=170	2400	120°	AL-22	8
G-517 NEW	30W	White	H=38, CO=Ø210, OD=220	3000	120°	-	8

Also available with dimmable driver on request

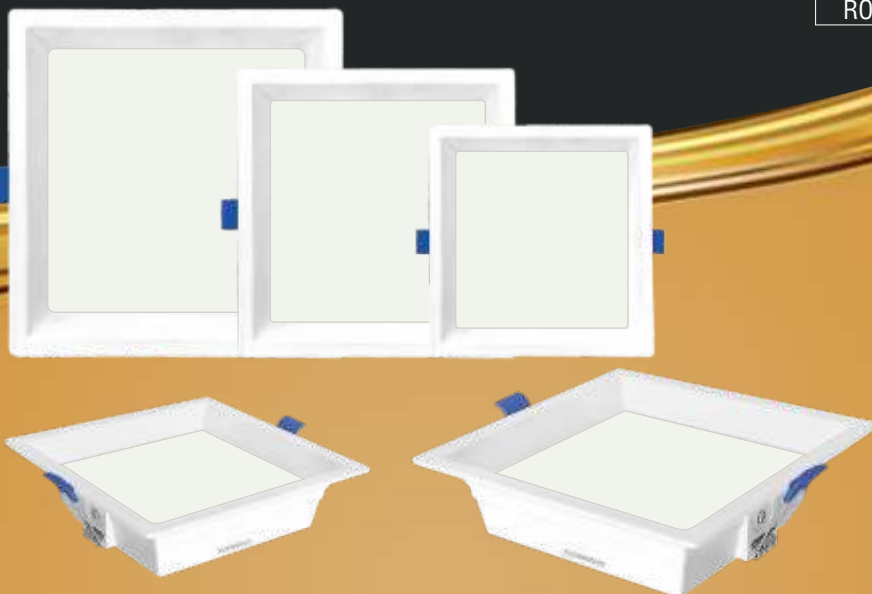

Royal - LED Deep Square Panel



Features :

- Aluminium housing to effectively dissipate heat
- PMMA diffuser for glare free lighting
- Durable and Compact design
- Recessed mounting



LED 2835



Non
Adjustable



Very Wide
Beam



Ceiling
Thickness



IP 20
Dust / Insect
protected




CRI
> 80



PF
> 0.90



4KV
Surge
Protection



(160-350V)
AC 50Hz



Colours Available
CW NW WW



Fluctuation Proof



2 YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm)	Lumen	Beam Angle	Driver	Packing Case
			H=Height, CO=Cut Out, L=Length, B=Breadth				
G-512	12W	White	H=40, CO=Ø102X102, L=120, B=120	1200	120°	AL-20	12
G-514	18W	White	H=40, CO=Ø127X127, L=145, B=145	1800	120°	AL-21	12
G-516	24W	White	H=40, CO=Ø153X153, L=170, B=170	2400	120°	AL-22	8

Also available with dimmable driver on request



Premium - LED Round Panel



Features :

- PMMA diffuser for glare free lighting
- Edge Lit Panel
- Recessed mounting
- Lower THD
- Aluminium housing to effectively dissipate heat
- Isolated IP20 electronic driver with APFC



LED 2835



Non Adjustable



Very Wide Beam



Ceiling Thickness



IP20
Dust / Insect protected




CRI > 80



PF > 0.90



4KV
Surge Protection



(160-350V)
AC 50Hz



Colours Available
CW NW WW




Fluctuation Proof



2 YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm) H=Height, CO=Cut Out, OD=Outer Diameter	Lumen	Beam Angle	Driver	Packing Case
L-97	6W	White	H=22, CO=Ø99, OD=116	450	120°	AL-23	20
L-98	12W	White	H=22, CO=Ø134, OD=140	900	120°	AL-44	12
L-99	15W	White	H=22, CO=Ø167, OD=178	1380	120°	AL-72	8
L-100	18W	White	H=22, CO=Ø180, OD=199	1400	120°	AL-81	8
L-95	22W	White	H=22, CO=Ø210, OD=224	1560	120°	AL-82	8

Also available with dimmable driver on request

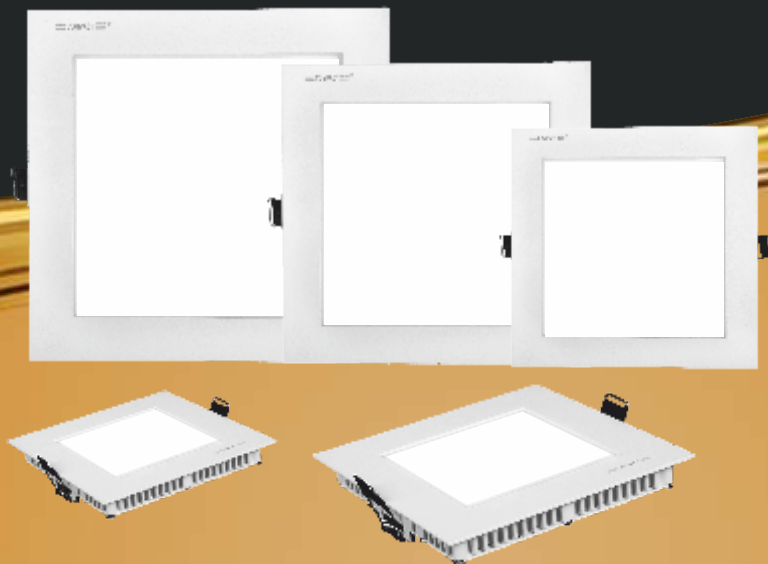

Premium - LED Square Panel

Features :

- PMMA diffuser for glare free lighting
- Edge Lit Panel
- Recessed mounting
- Lower THD
- Aluminium housing to effectively dissipate heat
- Isolated IP20 electronic driver with APFC



Cat No	Power	Body Colour	Dimensions (mm)	Lumen	Beam Angle	Driver	Packing Case
			H=Height, CO=Cut Out, OD=Outer Diameter				
L-91	6W	White	H=20, CO=Ø95XØ95, OD=111X111	430	120°	AL-23	20
L-92	12W	White	H=20, CO=Ø127XØ127, OD=134X134	820	120°	AL-44	12
L-93	15W	White	H=20, CO=Ø155XØ155, OD=168X168	1200	120°	AL-72	8
L-94	22W	White	H=20, CO=Ø204XØ204, OD=217X217	1630	120°	AL-82	8

Also available with dimmable driver on request



Round




Oval

Gemini - LED Surface Ceiling Light

Features :

- Backlit Downlight
- Polycarbonate Housing
- Anti Grare Borderless
- Surface Mounting



Gemini Round - LED Surface Ceiling Light

Cat No	Power	Body Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen	Beam Angle	Packing Case
G-284	15W	White	H=58, OD=202	1500	120°	20

Gemini Oval - LED Bulk Head - IP65 **NEW**

Cat No	Power	Body Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen	Beam Angle	Packing Case
G-285	18W	White	L=252, W=124, H=61	1600	120°	-

3W

6W

NEW



Princess



Prince

Inbed - LED Bed Lamp

Features :

- Indoor Application
- High Voltage Protection upto 4KV
- Decorative Bed Lamp
- Wall Mounting



LED 2835



Adjustable



Narrow
 Beam



IP 20
 Dust / Insect
 protected




CRI
 >80



PF
 >0.90



4KV
 Surge
 Protection



(180-350V)
 AC 50Hz



Colours Available
 CW NW WW



Fluctuation Proof




2 YEAR
 WARRANTY

Prince/Princess - LED Bed Lamp

Cat No	Power	Name	Body Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Lumen	Beam Angle	Packing Case
G-141	3W	Prince	Black	L=95, B=95, H=350	300	24°	-
G-142	6W	Princess	Black	L=184, B=103, H=78	600	24°	-

PROFILE LIGHTS






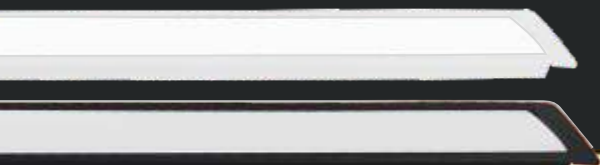



Recessed Profile



Recessed Profile
with Black Diffuser

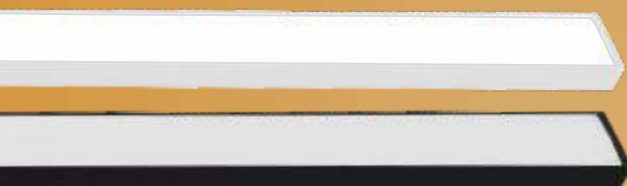

Surface Profile



ALCO LED Profile Recessed & Surface

Features :

- Extruded Aluminium Channel with Diffuser for use with LED Striplight
- Available in 1 Meter & 2 Meter, Natural & Black Body Colour



Cat No	Dimensions	Body Colour	Mounting	Use With	Packing Case
L-1707 (R) N	LED Profile - 17X07 mm	Natural	Recessed	L-801, L-804, L-806	50
L-1707 (R) B	LED Profile - 17X07 mm	Black	Recessed	L-801, L-804, L-806	50
L-1707BD (R)B	LED Profile - 17X07 mm	Black	Recessed	L-801, L-804, L-806	50
L-2310 (R) N	LED Profile - 23X10 mm	Natural	Recessed	L-801, L-804, L-806	40
L-1707 (S) N	LED Profile - 17X07 mm	Natural	Surface	L-801, L-804, L-806	50
L-1707 (S) B	LED Profile - 17X07 mm	Black	Surface	L-801, L-804, L-806	50
L-2310 (S) N	LED Profile - 23X10 mm	Natural	Surface	L-801, L-804, L-806	40




6W (White)

6W (Black)



12W (White & Black)



18W (White & Black)

Cabinet - LED Profile Light Surface

Features :

- Slim Body
- Built-in with LED source and driver
- Aluminum profile light with acrylic diffuser
- Use to decorate Home, Kitchen, office, Cabinet, etc.
- This under counter lighting will go perfectly with any furniture and cabinets



LED 2835



Non
Adjustable



Very Wide
Beam



Dust / Insect
protected




CRI
> 80



PF
> 0.90




3KV
Surge
Protection



(180-350V)
AC 50Hz



Colours Available




Fluctuation Proof



2 YEAR
WARRANTY


Cat No	Power	Body Colour	Mounting	Dimensions (mm) B=Breadth, H=Height, L=Length	Lumen	Packing Case
G-483	6W	Black/White	Surface	L=300, B=23, H=10	500	As per Order
G-484	12W	Black/White	Surface	L=600, B=23, H=10	1100	As per Order
G-486	18W	Black/White	Surface	L=900, B=23, H=10	1800	As per Order

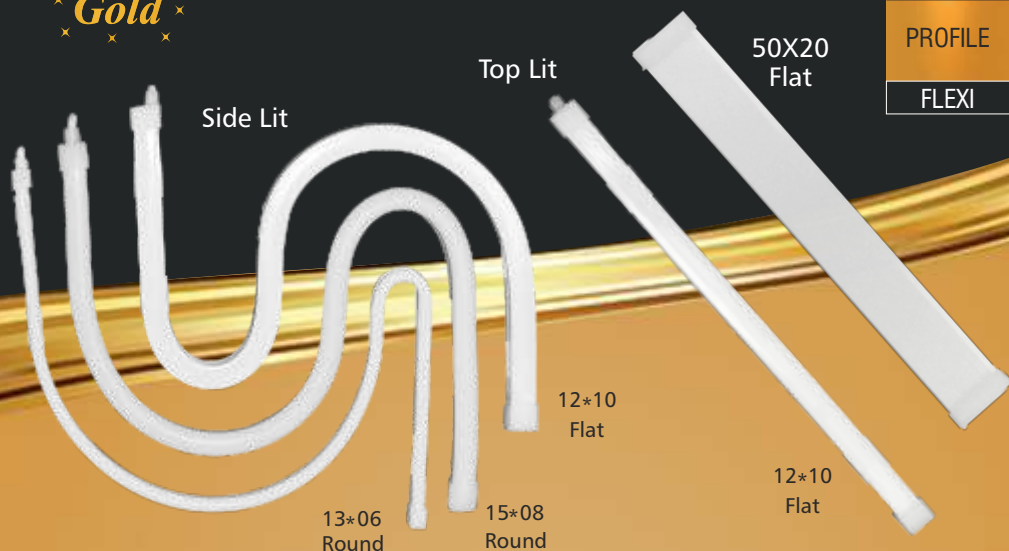

Flexi LED Profile - Surface

Features :

- Anti Yellowing
- Uniform illumination without spots
- Silicon injection moulded connector
- For Waterproofing profile use Silicon Gel on Side Caps
- Use with waterproof power supply for outdoor applications
- Silicon double extruded profile | Flexible | Flame Resistant

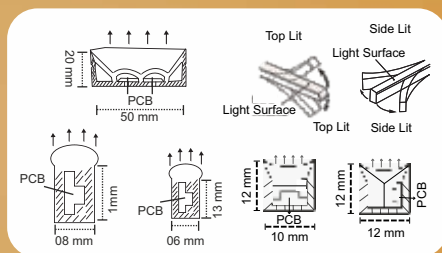

Cat No	Dimensions	PCB Width	Mounting	Used With	Packing Case
G-0808T	LED Profile - 08*08 mm - Top Lit - Flat	5 mm	Surface	L-804	20/45 Meter
G-1210T	LED Profile - 12*10 mm - Top Lit - Flat	8 mm	Surface	L-804	20/45 Meter
G-1616T	LED Profile - 16*16 mm - Top Lit - Flat	10 mm	Surface	L-808	20 Meter
G-3020T	LED Profile - 30*20 mm - Top Lit - Flat	10 mm	Surface	L-808	20 Meter
G-5020T	LED Profile - 50*20 mm - Top Lit - Flat	10 mm	Surface	L-808	20 Meter
G-1210S	LED Profile - 12*10 mm - Side Lit - Flat	8 mm	Surface	L-804	20/45 Meter
G-1306S	LED Profile - 13*06 mm - Side Lit - Round	8 mm	Surface	L-804	20/45 Meter
G-1508S	LED Profile - 15*08 mm - Side Lit - Round	8 mm	Surface	L-804	20/45 Meter


- Each meter includes : •End Caps 2 Nos. • Clip 2 Nos.
- Available in 20 meter & 45 meter Roll.



Neon - Flexi LED Light Surface

Features :

- Silicon double extruded profile light
- Use with waterproof power supply for outdoor application
- Flame Resistant
- Uniform Illumination without spots
- IP66 Waterproof
- For waterproofing profile use silicon gel on side caps
- Profile can be teamed with waterproof driver & made waterproof on installation with silicon Gel on end caps

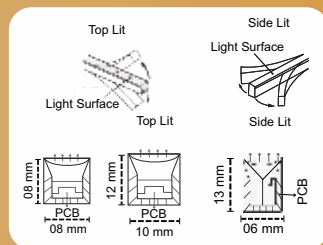

Cat No	Dimensions	PCB Width	Mounting	Used With	Packing Case
N-0808T /5M	LED Flexi Light - 08*08 mm - Top Lit - Flat	5 mm	Surface	L-805	5M/Roll x 4
N-1210T /5M	LED Flexi Light - 12*10 mm - Top Lit - Flat	8 mm	Surface	L-804	5M/Roll x 4
N-1616T /5M	LED Flexi Light - 16*16 mm - Top Lit - Flat	8 mm	Surface	L-804	5M/Roll x 4
N-3020T /5M	LED Flexi Light - 30*20 mm - Top Lit - Flat	10 mm	Surface	L-808	5M/Roll x 4
N-1212S /5M	LED Flexi Light - 12*10 mm - Side Lit - Round	8 mm	Surface	L-804	5M/Roll x 4
N-1306S /5M	LED Flexi Light - 13*06 mm - Side Lit - Round	5 mm	Surface	L-805	5M/Roll x 4

- End Cap - 2 Nos on 5 meter
- Clip - 5 Nos on 5 meter

12W

150W



12W Glamour
With Remote for Multiple Effects



150W Glamour



Glamour 12W - LED Stage Light



Features :

- Control Mode : Remote
- Working Environment : Indoor, -10°C - -45°C
- IP Grade : IP20
- LED Units : 36 LED
- Mount type free standing
- Durable built
- Various strobe light effect
- Versatile in use
- Easy to control
- Simple Plug & Play Operation allows for quick & effortless setup
- Enhanced lighting with 36 high quality LEDs
- Enhance the ambience of event
- Strong and impact full light O/P

Glamour 150W - LED Stage Light

Features :

- Control Mode : Auto, Master/Slave, DMX512, Sound Active
- Working Environment : Indoor, -20°C - -40°C
- R-G-B-W mixing color & R/G/B/W Multi color
- Beam Angle : 25°
- IP Grade : IP20
- LED Units : 54pcs x 3W (RGBW)
- Suitable for connecting with DMX controller
- Mount type free standing
- Various strobe light effect
- 4 Buttons and 4 bit digital LED on the panel



Adjustable Narrow Beam

Cat No	Power	Body Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Beam Angle	Packing Case
G-204	12W	Black	H=50, OD=185	25°	8
G-203	150W	Black	H=225, OD=220	25°	4



Vibe - Single



Vibe - Double



Silo

LED COB Updown Lighter

Features :

- Decorative lighting to create beautiful facade
- Provide evenly distributed comfort light
- Designed to withstand outdoor elements such as rain, wind, and UV exposure
- Ideal for outdoor applications • Wall Mounted



COB



Non
Adjustable



Narrow
Beam



IP66
Dust / Water
Protected



CRI
> 80




PF
> 0.90




4KV
Surge
Protection



Colours Available
(CW) (WW)



(180-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY

Vibe - LED COB Updown Lighter


Cat No	Power	Lights	Body Colour	Dimensions (mm) L=Length, B=Breadth	Lumen	Beam Angle	Packing Case
G-116	4W	Single	Black	L = 75, B = 63	350	60°	20
G-117	8W	Double	Black	L = 145, B = 75	700	60°	20

Silo - LED COB Updown Lighter

Cat No	Power	Lights	Body Colour	Dimensions (mm) L=Length, B=Breadth	Lumen	Beam Angle	Packing Case
G-115	10W	Double	Black	L = 148, B = 68, H = 79	900	36°	20



Single

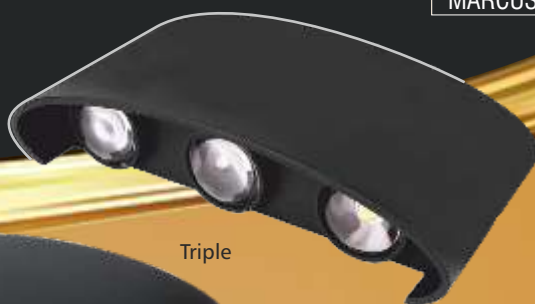

Triple



Double



4-Way

Marcus - LED Updown Lighter

Features :

- Modern designed wall washer with lens
- Decorative lighting to create facade
- Beam angle 60°
- Designed to withstand outdoor elements such as rain, wind, and UV exposure
- Wall Mounted



LED 2835



Non
Adjustable



Narrow
Beam



IP 66
Dust / Water
Proof



CRI
>80




PF
>0.90




4KV
Surge
Protection



Colours Available
CW WW R G B



(180-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY

Cat No	Power	Lights	Colour	Dimensions (mm) L = Length, B = Breadth	Lumen	Beam Angle	Packing Case
G-114	3W	Single	CW/WW	L=80, B=76	240	60°	20
G-122	6W	Double	CW/WW	L=119, B=76	480	60°	20
G-122C	6W	Double	R-B	L=119, B=76	-	60°	20
G-123	9W	Triple	CW/WW	L=160, B=76	720	60°	20
G-123C	9W	Triple	R-G-B	L=160, B=76	-	60°	20

Marcus- 4-Way Outdoor Light

Colours Available CW WW R GY B G

Cat No	Power	Colour	Dimensions (mm) L = Length, B = Breadth, H = Height	Lumen	Packing Case
G-126	4W	CW/WW	L=71, B=71, H=50	300	20
G-126C	4W	R-GY-B-G	L=71, B=71, H=50	-	20

5W

9W

10W



Target - Spot Light

Features :

- Modern garden spike enhances OUTDOOR spaces with style and durability
- Integration ensures high light efficiency and dispersion
- Create high intensity spot light effect
- Designed to withstand outdoor elements such as rain, wind, and UV exposure
- Surface Mounted




Adjustable Narrow Beam

Cat No	Power	Dimensions (mm) L = Length, OD = Outer Diameter	Lumen	Colour	Beam Angle	Packing Case
G-120	5W	L=78, OD=60	440	CW/NW/WW	60°	20
G-120 - B/R/G	5W	L=78, OD=60	-----	Blue / Red / Green	60°	20
G-121	9W	L=82, OD=75	900	CW/NW/WW	36°	20
G-121 - B/R/G	9W	L=82, OD=75	-----	Blue / Red / Green	36°	20

Laser - Narrow Beam Light

Cat No	Power	Dimensions (mm) L = Length, OD = Outer Diameter	Lumen	Colour	Beam Angle	Packing Case
G-361	10W	L=114, OD=75	900	CW/WW	8°	10
G-361-B/G	10W	L=114, OD=75	-----	Blue / Green	8°	10

Note : With Spike M.R.P. Rs.140/- Extra

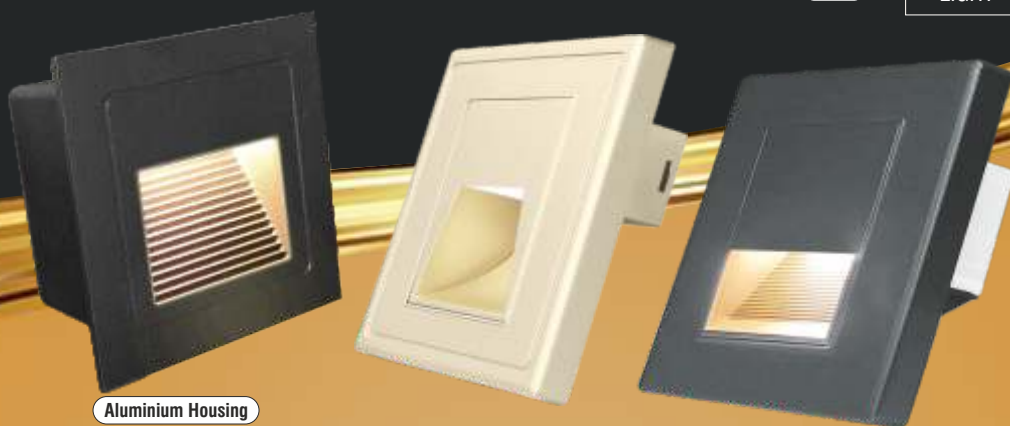

Aluminium Housing

Ikon

Quard

Rectangle

LED Instep Light

Features :

- A modern and minimalist step light blends in perfectly creating a soft atmosphere
- Provides beautiful light pattern
- Direct fit into 3"x3" box
- Auxiliary lighting for mounting on foot of the wall
- Designed to withstand outdoor elements such as rain, wind, and UV exposure



Ikon - Instep Light

Cat No	Power	Body Colour	Dimensions (mm) L=Length, CO=Cut Out	Lumen	Size	Packing Case
G-118	3W	Black	L=84, CO=65	270	Fit into - 3"*3" Box	20

Instep Light (Quard)

Cat No	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Size	Packing Case
G-119	3W	Gold	L=86, B=86, H=27	240	Fit into - 3"*3" Box	20

Instep Light (Rectangle)

Cat No	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Size	Packing Case
G-129	3W	Gun Grey/White	L=86, B=86, H=28	270	Fit into - 3"*3" Box	20



i-Shape



Keyhole

LED Instep Light

Features :

- A modern and minimalist step light blends in perfectly creating a soft atmosphere
- Provides beautiful light pattern
- Direct fit into 3"x3" box
- Auxiliary lighting for mounting on foot of the wall
- Designed to withstand outdoor elements such as rain, wind, and UV exposure



LED 2835



Non
Adjustable



Narrow
Beam



IP66
Dust / Water
Proof



CRI
>80




PF
>0.90



4KV
Surge
Protection



Colours Available
CW WW



(180-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY

Instep Light (Keyhole)


Cat No	Power	Body Colour	Dimensions (mm) L = Length, CO = Cut Out	Lumen	Size	Packing Case
G-128	3W	Gun Grey/White	L=86, B=86, H=32	270	Fit into - 3"*3" Box	20

Instep Light (i-Shape)

Cat No	Power	Body Colour	Dimensions (mm) L = Length, B = Breadth, H = Height	Lumen	Size	Packing Case
G-130	3W	Gun Grey/White	L=86, B=86, H=32	270	Fit into - 3"*3" Box	20



Dream

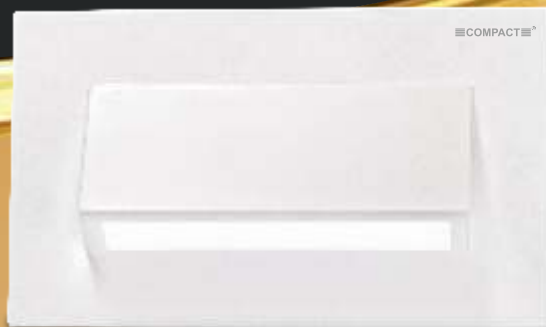

Trail

LED Night Light / Path Light

Features :

- Outdoor & Indoor application
- A modern and minimalist step light blends in perfectly creating a soft atmosphere
- Provides beautiful light pattern
- Auxiliary lighting for mounting on foot of the wall
- Designed to withstand outdoor elements such as rain, wind, and UV exposure



LED 2835



Non
Adjustable



Narrow
Beam



IP66
Dust / Water
Proof



CRI
>80




PF
>0.90



4KV
Surge
Protection



Colours Available
CW WW



(180-350V)
AC 50Hz



Fluctuation Proof



2YEAR
WARRANTY

Dream - LED Night Light

Cat No	Power	Body Colour	Dimensions (mm) L = Length, CO = Cut Out	Lumen	Size	Packing Case
G-124	2W	Gun Grey/White	L=85, B=85, H=24	180	Fit into - 3"*3" Box	20

Trail - LED Path Light

Cat No	Power	Body Colour	Dimensions (mm) L = Length, B = Breadth, H = Height	Lumen	Size	Packing Case
G-137	3W	White	L=151, B=90, H=43	250	Fit into - 5"*3", 4"*3", 3"*3" Box	20

12W



Round



Oval




Square

Wallux - LED Indoor & Outdoor Wall Light

Features :

- Acrylic Updown Fancy LED Light for Wall
- LED Power Saving and Durable
- Resistant to Exposure to the Sun and Cold, Excellent Waterproof Performance
- High voltage protection upto 4KV



Wallux Round - LED Indoor & Outdoor Wall Light

Cat No	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Beam Angle	Packing Case
G-133	12W	Black	L=135, B=95, H=106	800	100°	12

Wallux Oval - LED Indoor & Outdoor Wall Light

Cat No	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Beam Angle	Packing Case
G-134	12W	Black	L=160, B=124, H=75	800	-	12

Wallux Square - LED Indoor & Outdoor Wall Light

Cat No	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Lumen	Beam Angle	Packing Case
G-135	12W	Black	L=132, B=96, H=106	800	100°	12

10W

15W



Nexon Alpha



Nexon Beta

NEW



Grace

NEW



Pulsar

Nexon Alpha/Beta/Grace/Pulsar - LED Outdoor Wall Light

Features :

- Built in crystallized acrylic for twinkling effect
- Minimalistic design
- Prismatic Diffuser
- High voltage protection upto 4KV



LED 2835



Non
Adjustable



Narrow
Beam



IP 66
Dust / Water
Proof



CRI
> 80



PF
> 0.90



4KV
Surge
Protection



Colours Available
C W W W



(180-350V)
AC 50Hz



Fluctuation Proof



2YEAR
WARRANTY

Cat No	Power	Name	Body Colour	Dimensions (mm)	Lumen	Packing Case
				L = Length, B = Breadth, H = Height		
G-132A	10W	Nexon Alpha	Black	L = 132, B = 116, H = 135	800	12
G-132B	10W	Nexon Beta	Black	L = 132, B = 116, H = 135	800	12
G-138 NEW	15W	Pulsar	Black	L = 204, B = 150, H = 84	1200	8
G-136 NEW	15W	Grace	Black	L = 245, B = 112, H = 90	1200	8



Caro - LED 3-Way Outdoor Wall Decorative Light

Features :

- Decorative and neatly designed wall light
- Designed to withstand outdoor conditions, ensuring durability and reliability
- Diffused light coupled with spot light at two ends to create facade effects
- Suitable for general and facade lighting



LED 2835



Non
Adjustable



Narrow
Beam



IP 66
Dust / Water
Proof



CRI
> 80



PF
> 0.90



4KV
Surge
Protection



Colours Available
CW WW



(180-350V)
AC 50Hz



Fluctuation Proof




2 YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm)	Lumen	Beam Angle	Packing Case
			L = Length, B = Breadth, H = Height			
G-131	10W	Black	L=220, B=64, H=60	700	60°	12



18W BRICK



8W BRICK



COSMO

Brick - LED Wall Light

Features :

- Decorative wall light with even light distribution
- Glare diffuser to reduce eye strain
- Diffused light coupled with spot light at two ends to create facade effects
- Surface Mounted
- Used for indoor / outdoor applications



LED 2835



Non
Adjustable



Narrow
Beam



IP 66
Dust / Water
Proof



CRI
>80



PF
>0.90



4KV
Surge
Protection



Colours Available
CW WW



(180-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY

Cat No	Power	Body Colour	Dimensions (mm) L=Length, H=Height, B=Breadth	Lumen	Packing Case
G-125	8W	Black	L=117, H=85, B=117	560	20
G-127	18W	Black	L=170, H=88, B=170	1400	12

Cosmo - LED Bulk Head

Cat No	Power	Body Colour	Dimensions (mm) L=Length, H=Height, B=Breadth	Lumen	Packing Case
L-277	12W	White	L=202, H=62, B=101	1200	20



Beacon



Milaan



Bollard Light



Gate Light / Bollard Light with E-27 Holder

Features :

- Minimalistic Design
- Dust & Water Proof
- Prismatic Diffuser
- Decorative Light
- Use for Home Gate, Villas, Park Boundary Walls, Farm Houses, Terrace Walls, Entrances, Terrace Garden Boundary and Mall Gate Entryway

Beacon - Gate Light with E-27 Holder

Cat No	Body Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Holder Type	Packing Case
G-351	Black	H=270, OD=242	E-27	4

Milaan - Gate Light with E-27 Holder

MRP does not include Bulb

Cat No	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height	Holder Type	Packing Case
G-353	Black	L=220, W=220, H=290	E-27	4

Beacon - Bollard Light with E-27 Holder

MRP does not include Bulb

Cat No	Body Colour	Dimensions (mm) H=Height, OD=Outer Diameter	Holder Type	Packing Case
G-355	Black	H=650, OD=242	E-27	4

MRP does not include Bulb

18W



Twinkle



Milaan



Bollard Light

Gate Light / Bollard Light

Features :

- Built in crystallized reflector for twinkling effect
- Minimalistic Design
- Prismatic Diffuser
- Use for Home Gate, Villas, Park Boundary Walls, Farm Houses, Terrace Walls, Entrances, Terrace Garden Boundary and Mall Gate Entryway
- High Voltage protection upto 4KV
- Dust & Water Proof
- Decorative Light



LED 2835



Non Adjustable



IP66
Dust / Water
Proof



CRI
> 80



PF
> 0.90



4KV
Surge
Protection



Colours Available
CW WW



(100-350V)
AC 50Hz



Fluctuation Proof



2 YEAR
WARRANTY

Gate Light

Cat No	Name	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height, OD=Outer Diameter	Lumen	Packing Case
G-371	Twinkle	18W	Black	H=270, OD=242	1200	4
G-373	Milaan	18W	Black	L=220, B=220, H=290	1800	4

Bollard Outdoor Light

Cat No	Name	Power	Body Colour	Dimensions (mm) L=Length, B=Breadth, H=Height, OD=Outer Diameter	Lumen	Packing Case
G-375	Twinkle	18W	Black	H=650, OD=242	1200	4
G-376	Milaan	18W	Black	L=220, B=220, H=650	1800	4

Our Energy Saving products are approved & regularly used by the following esteemed Organisations of India.



CLIENT PORTFOLIO



Sobti Sapphire, Rudrapur



Fort Collins, Ludhiana



Khadim's, Aligarh



Mega Heights - Bareilly



Park View Society, Prayagraj



SEA VIEW HOTEL, Mangalore



Transport Nagar Aligarh



Hero Showroom, Lakhimpur



Raja Ji Dhaba - Joya

CLIENT PORTFOLIO



Amity School - Noida



GD Goenka Public School-New Delhi



Delhi Public School - Hapur



Indus Valley Public School - Noida



Kohli's Sweets, Patiala



Tilak Maharashtra University-Delhi



MM University - Mullana



United University - Prayagraj



Indian Statistical Institute-Bangalore



Prometheus School - Noida



Life-Line Hospital - Bareilly



Apollo Hospital - Noida



Sant Gyaneshwar Hospital
Bareilly



Rajiv Gandhi Cancer Institute &
Research Center - New Delhi



Payyanur Co-Operative Hospital
Kerala



The Oberoi Rajvilas Hotel
Rajasthan



Radisson Blu Hotel
Rudrapur



Country Inn & Resort
Ghaziabad



Alcazar Wedding Resort
Patiala



The Blue Orchid Hotel & Resort
Ramnagar



Shoppers Stop - Hyderabad



Pacific Mall - New Delhi



Westside Showroom - Bareilly



Tanishq Showroom - Bareilly



Hyundai Showroom - Noida



State Bank of India - NCR



HDFC Bank - NCR



Red Fort Ramleela Maidan - Delhi



Indian Oil Corporation - Delhi



BPCL Petrol Pump
U.P. & Uttarakhand



General Notes:

- This Price List is effective from 1st April 2025
- Every effort has been made to ensure accuracy in compilation of technical/commercial detail in this catalogue
- Specifications and performance data are constantly changing; current details should therefore be checked with the company
- Input Voltage : 160V-350V AC 50Hz
- CRI > 80 of Cool White Colour
- Colour : Cool White- 6000K - 6500K
- Neutral White- 4000K - 4200K
- Warm White- 2800K-3000K
- M.R.P. is inclusive of all taxes
- M.R.P. is inclusive of electronic driver (unless mentioned otherwise)
- All lumens are system lumens.
- All wattages are system wattages.
- All dimensions are in mm
- H=Height, CO=Cutout, OD=Outer Diameter, L=Length, B=Breadth
- CW=Cool White, NW=Neutral White, WW=Warm White, WH=White, W=White, R=Red, Y=Yellow, B=Blue, G=Green, P=Purple

CAPTAIN GEARS & FANS

B-84 Sector 80, Phase-II Noida - 201305 (U.P.)
Call us : 9810145540, 8527708877
AN ISO 9001:2015 CERTIFIED COMPANY

Download Catalogue by
Scanning This QR Code

